
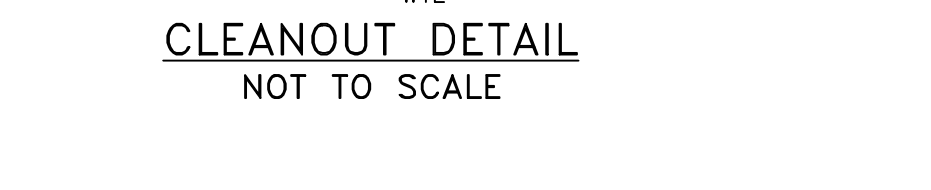


© 2006 The Authors
Journal compilation © 2006 Blackwell Publishing Ltd

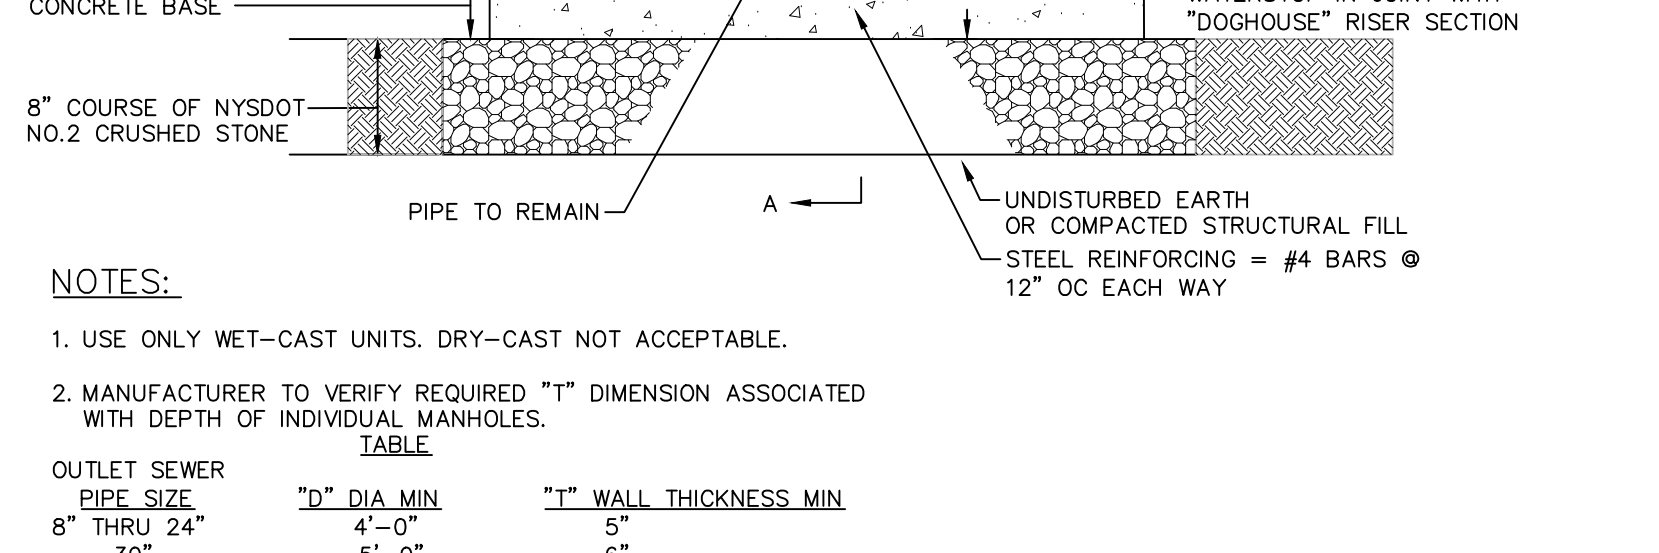

NOT TO SCALE



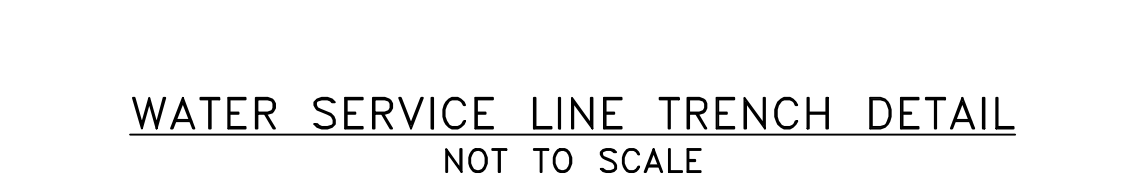
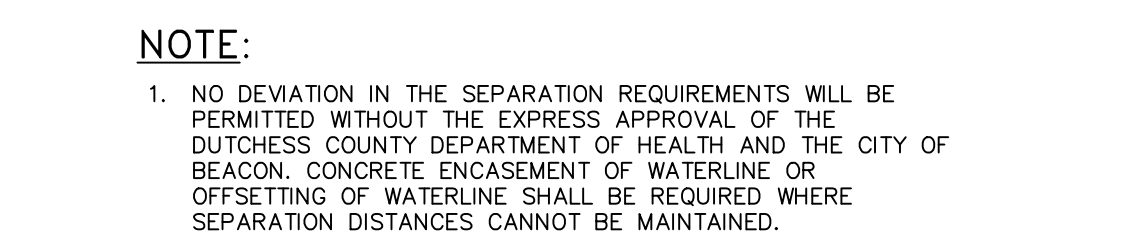
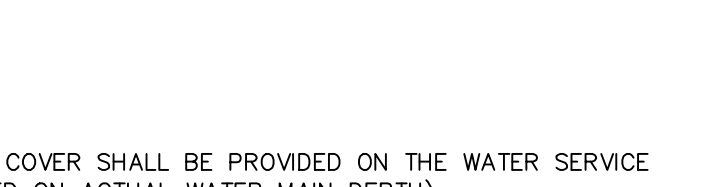
REPLACE PAVEMENT IN-KIND, IN GRASSED AREAS, COMPLETE BACKFILL WITH A MINIMUM OF 3" TOPSOIL & SEED

EXISTING GROUND


FINAL GRADE

EXISTING GROUND



The diagram shows a cross-section of a road and its adjacent grassed area. On the left, a road cross-section is shown with layers of pavement and subgrade. An arrow points from the text 'REPLACE PAVEMENT IN-KIND, IN GRASSED AREAS, COMPLETE BACKFILL WITH A MINIMUM OF 3" TOPSOIL & SEED' to the grassed area. The grassed area is shown as a hatched region. The top of the grassed area is labeled 'FINAL GRADE'. The existing ground level on both sides of the road is indicated by a dashed line and labeled 'EXISTING GROUND'.

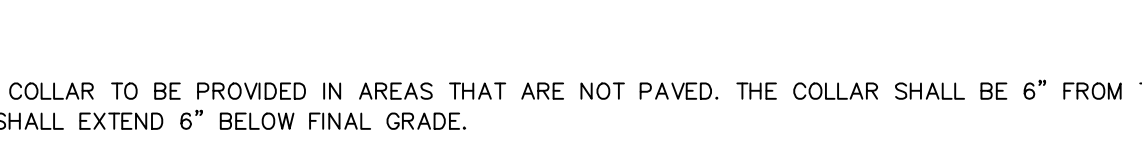CITY OF
DEPARTMENT



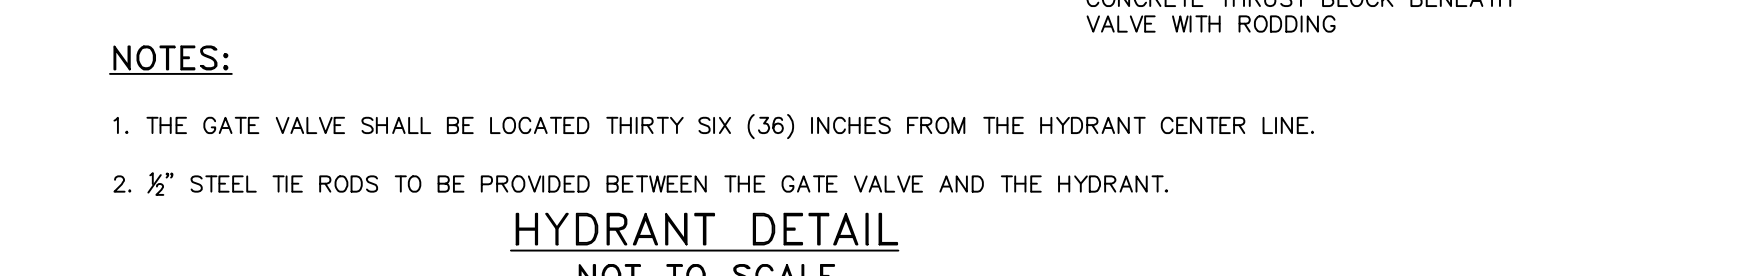

Surveyor: 3201

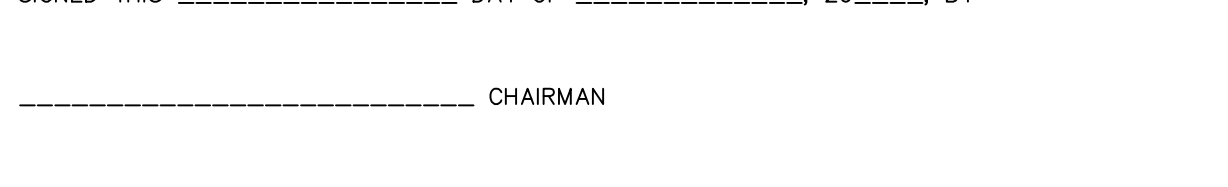

Water and Sewer Details

dgewater

Scale: As Noted
December 22, 2016