
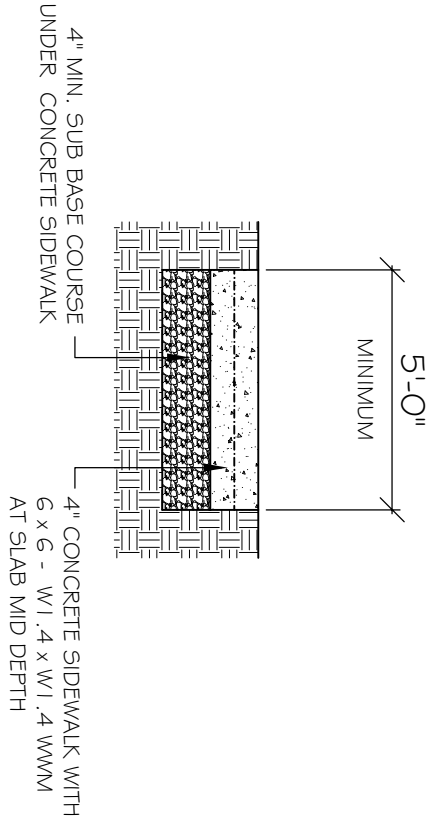


STEEL CURB DETAIL

NOT TO SCALE

CAST IN PLACE CONCRETE CURB DETAIL

NOT TO SCALE

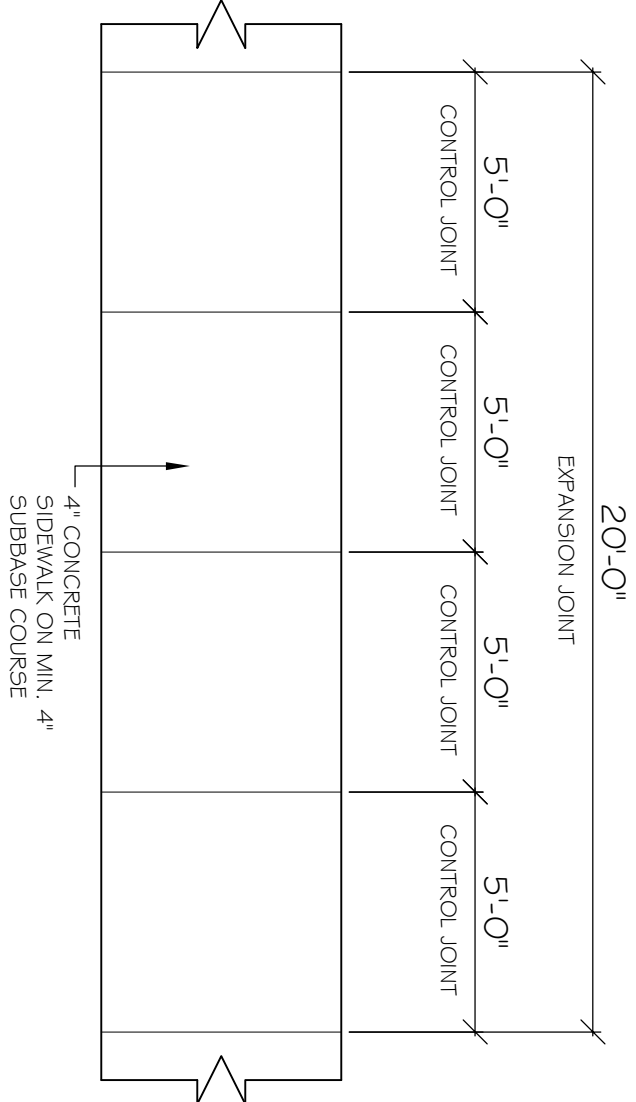

TYPICAL CONCRETE SIDEWALK PLAN

TYPICAL CONCRETE SIDEWALK SECTION

CONCRETE SIDEWALK NOTES:

1. ALL CONCRETE SIDEWALKS TO BE 3,500 PSI CAST IN PLACE CONCRETE.
2. PROVIDE HAND TOoled TRANSVERSE CONTROL JOINTS @ 5'-0" O.C. MAX.
3. PROVIDE RE MOded EXPANSION JOINTS WITH HAND TOoled EDGES @ 20'-0" O.C. MAX.
4. ALL JOINTS TO BE FULL DEPTH AND PROPERLY SEALED AT SLAB MID DEPTH.
5. ALL DPOSED CONCRETE SURFACE TO HAVE BROOM TEXTURE FINISH.
6. JOINTS WILL NOT BE SAWCUT.
7. ALL DPOSED CONCRETE SURFACE TO BE TREATED WITH SUREBOND FOR EQUAL SIDEWALK SPALLER IN ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS.

TYPICAL CONCRETE SIDEWALK DETAIL

NOT TO SCALE