


DMC 100SS PROFILE



IDEAL APPLICATION COMMERCIAL & RESIDENTIAL

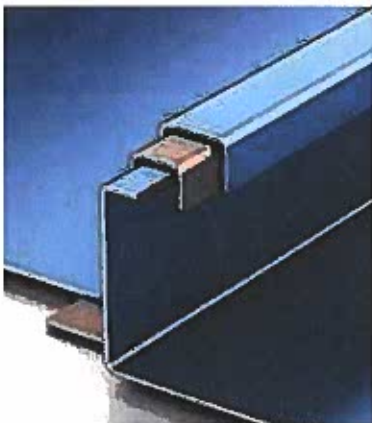

Single lock panel






Double lock panel

Quality materials and more than 100 years of successful design application govern the construction of our DMC 100SS 1" mechanically seamed metal roof system. Ideal for light commercial or residential applications, this smartly detailed profile can be curved for enhanced architectural appeal. Installed as full-length panels with no end laps helps provide the ultimate in all-weather and watertight protection curved installations.



DMC 100SS PROFILE

DrexelMetals
Roofing Systems + Custom Fabrication

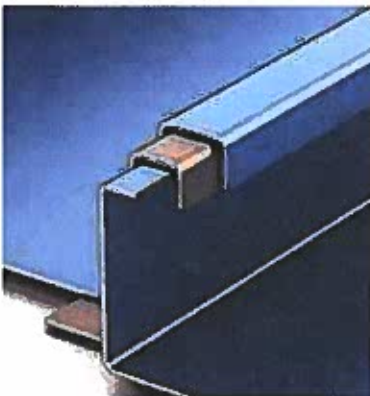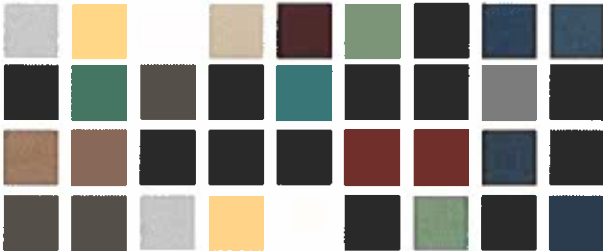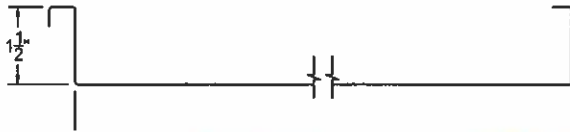

Unseamed panel



Double lock panel



MetShield
Underlayment



Testing in accordance with



AVAILABLE WIDTHS

12", 14", 16", 18", 19", 20" or 21"*

*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

SUBSTRATES AVAILABLE

- Galvalume® - 24ga and 26ga
- Drexlume® - 24ga and 26ga
- Aluminum - .032"
- Copper - 16 oz and lead-coated copper
- Falzinc

PROFILE OPTIONS

- Single lock panel
- Double lock panel
- Radius panel (single or double lock)

FINISHES AND PRODUCT WARRANTY:

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

GALVALUME® SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

ALUMINUM SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

DREXLUME® SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

PRODUCTION OPTIONS

Factory made or field rolled to exact lengths

Optional: striation, beads, pencil ribs

INSTALLATION

Can be installed over plywood decking and Drexel Metals MetShield® underlayment.

SLOPE

Minimum slope 2:12

MINIMUM ROOF PITCH

2:12 - low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third Party Verified

valspar
If it matters, we're on it.™