


***Drainage Report:
for
38 St. Lukes Subdivision***

Prepared for:

Beacon 226 Main, LLC.
1 East Main Street, Unit 1
Beacon, NY 12508

June 26, 2018



Prepared by:
Hudson Land Design Professional Engineering, P.C.
174 Main Street
Beacon, NY 12508
Ph: (845) 440-6926

TABLE OF CONTENTS

1.0 INTRODUCTION.....1

2.0 METHODOLOGY AND REGULATORY COMPLIANCE1

3.0 SOIL CONDITIONS.....1

4.0 EXISTING DRAINAGE CONDITIONS2

5.0 PROPOSED DRAINAGE CONDITIONS.....3

6.0 DRAINAGE ANALYSIS CONCLUSIONS4

7.0 EROSION AND SEDIMENT CONTROL.....5

APPENDICES

APPENDIX A:	DRAINAGE MAP
APPENDIX B:	SUPPORTING DATA
APPENDIX C:	PRE-DEVELOPMENT HYDROLOGY CALCULATIONS
APPENDIX D:	POST-DEVELOPMENT HYDROLOGY CALCULATIONS
APPENDIX E:	PRODUCT CUT SHEETS

1.0 INTRODUCTION

The 38 St. Lukes Subdivision project is located at 38 St. Lukes Place in the City of Beacon, Dutchess County, New York. The project consists of one parcel, Tax ID: 6054-38-156634 (± 0.405 ac). Parcel 156634 contains an existing single-family residence. The project proposes to subdivide the existing parcel into three lots, with the existing residence to remain as one of the three lots, and the remainder two being building lots. The parcel is in the R1-5 zoning district.

2.0 METHODOLOGY AND REGULATORY COMPLIANCE

The proposed development of Parcel 156634 will result in 4,002 sqft of additional impervious area and 12,639 sqft of disturbance, and therefore is not subject to the requirements of NYSDEC GP-0-15-002 General Permit for Construction Activities. Pre-development vs. post-development drainage analysis for the project was performed to evaluate stormwater runoff patterns and demonstrate that the post-development runoff rates to the existing stormwater discharge points do not exceed the pre-development runoff rates.

Runoff calculations were performed utilizing HydroCAD® version 10.00 published by HydroCAD Software Solutions, LLC. The software utilizes the principles of TR-55 and TR-20 to generate unit hydrographs. Rainfall events are generated utilizing Soil Conservation Service (SCS) Type III, 24-hour rainfall event for Dutchess County, NY. The Type III rainfall depths for the 1-Year, 10-Year, 25-Year and 100-Year rainfall events are 2.61, 4.71, 5.92 and 8.37 inches, respectively. Rainfall Data can be found within Appendix B of this report.

3.0 SOIL CONDITIONS

A review of the Soil Survey of Dutchess County indicates that there is one type of soil present on the project site and its associated contributing drainage area. Table I below summarizes the characteristics of the soil types present within the drainage area.

Table I: Soil Types

Map Unit	Soil Names	Water Table (ft)	Bedrock	Hydrologic Soil Group	Erosion Hazard
KuA	Knickerbocker Urban Land Complex, nearly level	>96"	>96"	A	Low

Source: websoilsurvey.sc.egov.usda.gov

Soil testing in the proposed infiltration area on the northern side of Lot 2 was conducted on May 9, 2018 (Deep Test Pits) and May 10, 2018 (Infiltration Tests). Two test pits were excavated to a total depth of 8 feet and were primarily comprised of a brown sandy loam with cobbles

throughout. Test Pit 1 had 6" of topsoil over 90" of the brown sandy-loam. No bedrock, groundwater or mottling was observed. Test Pit 2 had 6" of topsoil over 90" of brown sandy loam. No bedrock, no groundwater or mottling was observed in Test Pit 2. The soil components are uniform throughout the entire project area.

One infiltration test was conducted in the stormwater infiltration area. The infiltration test was run three times at a depth of 96" at the bottom. Infiltration Test 1 stabilized at 5.0 inches per hour.

Supporting information has been provided in Appendix B.

4.0 EXISTING DRAINAGE CONDITIONS

4.1 Design Points

Design Points represent the location where the majority of runoff from an area exits the site. The same design point is identified in post-development conditions, so that a comparison can be made between the pre-development and post-development conditions. Two design points for the main project area were selected, and are as follows:

Table II - Stormwater Design/Discharge Point	
SDP	Description
1	St. Luke's Place Municipal Stormwater Sewer System
2	Existing low point on Lot 1

4.2 Existing Watershed Area

The pre-developed watershed is 16,334 sqft in total, which includes the existing grassed area around the existing residence, a portion of Union Street and a section of the existing house and concrete patio. In the drainage analysis model, the existing pre-development area is delineated as subcatchment 1 and subcatchment 2. Drainage generally flows via sheet flow and shallow concentrated flow to the stormwater design points; 1 and 2, located on the western property line and the low point within the existing parcel, respectively.

The Time of Concentration (Tc) is less than 6 minutes, so a minimum of 6 minutes was used for all subcatchments, and therefore the Tc is not graphically shown or listed on the drainage map. The watershed area contributing to the SDP's is graphically shown and listed on the drainage map, and is also provided within the HydroCAD computations within Appendix C. A drainage map is included within Appendix A.

4.3 Existing Runoff Rates

Runoff rates for existing conditions have been calculated at the designated SDP and summarized in Table III as follows:

TABLE III - EXISTING RUNOFF RATES

Runoff Rates (cfs)					
Designation	Area (sqft)	1-Year	10-Year	25-Year	100-Year
SDP 1	3,002	0.00	0.03	0.08	0.19
SDP2	13,332	0.00	0.11	0.30	0.81

Unit hydrograph analysis results for pre-development conditions have been included as Appendix C.

5.0 PROPOSED DRAINAGE CONDITIONS

5.1 Developed Watershed Area

The proposed project results in a total of 12,639 sqft of disturbance due to the construction of the two proposed single-family residences, driveways, municipal water and sewer connections and infiltration chamber construction. The post-developed watershed area is 16,334 sqft in total, and includes the proposed residences, driveways, and grass & landscaped areas. The post development watershed was delineated into four stormwater subcatchments; subcatchment 11, subcatchment 20, subcatchment 21 and subcatchment 22.

Subcatchment 11 consists of the eastern portion of Lot 2. This area consists of part of the proposed driveway, some grass area and a portion of Union Street. The subcatchment contains soils in hydrologic soil group A. Drainage generally flows via sheet flow and shallow concentrated flow to the stormwater design point located on the western property line in St. Lukes Place.

Subcatchment 20 consists of the proposed residence on Lot 2, a small portion of Lot 2's proposed driveway and grassed areas and a portion of Union Street. The subcatchment contains soils in hydrologic soil group A. Drainage generally flows via sheet flow and shallow concentrated flow to a yard drain and then to stormwater infiltrator units located in the rear of lot 2. All stormwater is mitigated using infiltration.

Subcatchment 21 consists of a portion of the existing residence's pitched roof and concrete patio, a small portion of Lot 2's proposed driveway and grassed areas. The subcatchment contains soils in hydrologic soil group A. Drainage generally flows via sheet flow and shallow concentrated flow to stormwater design point 2 located at the low point in the rear of Lot 1.

Subcatchment 22 consists of the proposed residence on Lot 3, the proposed driveway, grassed areas and a portion of Union Street. The subcatchment contains soils in hydrologic soil group A. Drainage generally flows via sheet flow and shallow concentrated flow to a yard drain and then

to stormwater infiltrator units located in the rear of Lot 3. Stormwater is mitigated using infiltration for the increased impervious area on both Lot 2 and Lot 3.

The Time of Concentration (Tc) for all subcatchments is less than 6 minutes, so a minimum of 6 minutes was used, and therefore the Tc's are not graphically shown or listed on the drainage map. The watershed area contributing to the SDP's is graphically shown and listed on the drainage map. The hydrologic model can be found in Appendix D. A post-development drainage map is included within Appendix A.

5.2 Proposed Runoff Rates

Runoff rates for proposed conditions have been calculated at the designated SDP and summarized in Table IV as follows:

**TABLE IV
PROPOSED RUNOFF RATES**

Runoff Rates (cfs)

Designation	Area (sqft)	1-Year	10-Year	25-Year	100-Year
SDP 1	2,438	0.00	0.04	0.08	0.18
SDP 2	6,654	0.00	0.11	0.23	0.52

Unit hydrograph analysis results for post-development conditions have been included as Appendix D.

6.0 DRAINAGE ANALYSIS CONCLUSIONS

The stormwater runoff rates at both SDP's under pre-development and post-development conditions are summarized below.

SDP	1 – Year (cfs)		10 – Year (cfs)		25 – Year (cfs)		100 – Year (cfs)	
	Pre	Post	Pre	Post	Post	Post	Pre	Post
1	0.00	0.00	0.03	0.04	0.08	0.08	0.19	0.18
2	0.00	0.00	0.11	0.11	0.30	0.23	0.81	0.52

The runoff rates at the SDP decrease from pre-development to post-development conditions with for all subcatchments, for all storms, with the exception of the post development 10-year storm for SDP1. However, the slight increase in rate is justified due to the volume of runoff staying the same for pre and post conditions (0.003 acre-feet).

The increased impervious area created by the development of Lot 2 and Lot 3 is mitigated by infiltrating the increased runoff into Stormtech SC310 infiltration chambers placed underground. Lot 2 has six proposed SC310 chambers configured in three rows. Lot 3 requires 10 chamber units configured in 5 rows to mitigate increased runoff.

Supporting hydrologic analyses for pre-development and post-development conditions are included in Appendices C and D.

7.0 EROSION AND SEDIMENT CONTROL

Contractors shall adhere to the temporary and permanent erosion control measures as indicated on the plans. Repairs shall be made as necessary to remain in compliance with the New York State Standards and Specifications for Erosion and Sediment Control, 2016.

APPENDIX A
DRAINAGE MAPS

APPENDIX B

SUPPORTING DATA

Extreme Precipitation Tables

Northeast Regional Climate Center

Data represents point estimates calculated from partial duration series. All precipitation amounts are displayed in inches.

Smoothing	Yes
State	New York
Location	
Longitude	73.962 degrees West
Latitude	41.499 degrees North
Elevation	0 feet
Date/Time	Mon, 18 Jun 2018 15:15:07 -0400

Extreme Precipitation Estimates

	5min	10min	15min	30min	60min	120min		1hr	2hr	3hr	6hr	12hr	24hr	48hr		1day	2day	4day	7day	10day	
1yr	0.33	0.50	0.62	0.82	1.02	1.27	1yr	0.88	1.20	1.45	1.77	2.15	2.61	2.96	1yr	2.31	2.85	3.29	3.96	4.59	1yr
2yr	0.39	0.60	0.74	0.98	1.23	1.53	2yr	1.06	1.43	1.75	2.15	2.61	3.17	3.57	2yr	2.80	3.44	3.94	4.64	5.29	2yr
5yr	0.46	0.71	0.89	1.19	1.52	1.92	5yr	1.32	1.76	2.20	2.70	3.29	3.97	4.53	5yr	3.51	4.35	5.01	5.79	6.54	5yr
10yr	0.51	0.80	1.02	1.38	1.79	2.27	10yr	1.55	2.07	2.62	3.22	3.91	4.71	5.42	10yr	4.17	5.21	6.01	6.84	7.69	10yr
25yr	0.60	0.95	1.21	1.67	2.23	2.85	25yr	1.92	2.56	3.30	4.06	4.94	5.92	6.87	25yr	5.24	6.61	7.65	8.53	9.53	25yr
50yr	0.68	1.09	1.39	1.95	2.62	3.38	50yr	2.26	3.00	3.93	4.84	5.87	7.04	8.23	50yr	6.23	7.91	9.19	10.09	11.21	50yr
100yr	0.77	1.24	1.60	2.27	3.10	4.03	100yr	2.68	3.53	4.68	5.78	7.00	8.37	9.86	100yr	7.41	9.48	11.04	11.94	13.20	100yr
200yr	0.87	1.43	1.85	2.65	3.67	4.79	200yr	3.16	4.15	5.58	6.90	8.35	9.96	11.82	200yr	8.81	11.37	13.28	14.13	15.55	200yr
500yr	1.05	1.73	2.25	3.27	4.59	6.03	500yr	3.96	5.15	7.04	8.71	10.54	12.55	15.03	500yr	11.10	14.46	16.96	17.67	19.33	500yr


Lower Confidence Limits

	5min	10min	15min	30min	60min	120min		1hr	2hr	3hr	6hr	12hr	24hr	48hr		1day	2day	4day	7day	10day	
1yr	0.28	0.44	0.53	0.72	0.88	1.09	1yr	0.76	1.06	1.25	1.60	2.01	2.08	2.36	1yr	1.84	2.27	2.59	3.32	4.16	1yr
2yr	0.37	0.58	0.71	0.96	1.19	1.42	2yr	1.03	1.39	1.61	2.06	2.59	3.08	3.46	2yr	2.72	3.33	3.79	4.49	5.14	2yr
5yr	0.42	0.65	0.81	1.11	1.41	1.66	5yr	1.22	1.62	1.88	2.42	3.01	3.67	4.18	5yr	3.25	4.02	4.59	5.31	6.09	5yr
10yr	0.47	0.72	0.90	1.25	1.62	1.85	10yr	1.40	1.81	2.12	2.72	3.38	4.16	4.83	10yr	3.69	4.65	5.28	6.02	6.92	10yr
25yr	0.54	0.82	1.03	1.46	1.93	2.14	25yr	1.66	2.09	2.46	3.06	3.94	4.89	5.85	25yr	4.33	5.63	6.36	7.10	8.19	25yr
50yr	0.60	0.92	1.15	1.65	2.22	2.38	50yr	1.91	2.33	2.77	3.42	4.44	5.54	6.77	50yr	4.91	6.51	7.32	8.05	9.33	50yr
100yr	0.68	1.03	1.29	1.87	2.56	2.68	100yr	2.21	2.62	3.13	3.81	5.02	6.24	7.85	100yr	5.53	7.55	8.43	9.11	10.63	100yr
200yr	0.77	1.16	1.47	2.13	2.98	2.99	200yr	2.57	2.93	3.54	4.28	5.67	6.99	9.12	200yr	6.19	8.77	9.72	10.30	12.13	200yr
500yr	0.92	1.37	1.76	2.56	3.65	3.49	500yr	3.15	3.41	4.19	4.99	6.70	8.13	11.14	500yr	7.20	10.72	11.73	12.10	14.45	500yr

Upper Confidence Limits


	5min	10min	15min	30min	60min	120min		1hr	2hr	3hr	6hr	12hr	24hr	48hr		1day	2day	4day	7day	10day	
1yr	0.36	0.56	0.68	0.92	1.13	1.36	1yr	0.97	1.33	1.53	1.97	2.43	2.82	3.20	1yr	2.49	3.08	3.57	4.25	4.93	1yr
2yr	0.40	0.62	0.77	1.04	1.28	1.54	2yr	1.10	1.51	1.74	2.25	2.80	3.34	3.71	2yr	2.95	3.56	4.10	4.82	5.47	2yr
5yr	0.49	0.76	0.94	1.29	1.64	1.96	5yr	1.42	1.91	2.26	2.89	3.66	4.26	4.88	5yr	3.77	4.70	5.41	6.28	7.01	5yr
10yr	0.58	0.89	1.11	1.55	2.00	2.37	10yr	1.72	2.31	2.74	3.53	4.49	5.21	6.01	10yr	4.61	5.78	6.70	7.69	8.48	10yr
25yr	0.72	1.10	1.37	1.95	2.57	3.05	25yr	2.22	2.98	3.57	4.73	5.88	6.79	7.92	25yr	6.01	7.62	8.92	10.04	10.93	25yr
50yr	0.85	1.29	1.61	2.32	3.12	3.70	50yr	2.69	3.62	4.35	5.83	7.21	8.32	9.76	50yr	7.37	9.39	11.09	12.30	13.24	50yr
100yr	1.01	1.52	1.91	2.75	3.78	4.50	100yr	3.26	4.40	5.30	7.20	8.83	10.20	12.02	100yr	9.03	11.56	13.78	15.10	16.05	100yr
200yr	1.19	1.79	2.26	3.28	4.57	5.45	200yr	3.94	5.33	6.47	8.86	10.82	12.52	14.82	200yr	11.08	14.25	17.15	18.53	19.46	200yr
500yr	1.49	2.22	2.85	4.14	5.89	7.05	500yr	5.08	6.89	8.41	11.70	14.17	16.44	19.52	500yr	14.55	18.77	22.91	24.33	25.10	500yr

Soil Map—Dutchess County, New York
(38 St. Lukes Place)





MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)

Soils

 Soil Map Unit Polygons

 Soil Map Unit Lines

 Soil Map Unit Points

Special Point Features



Blowout



Borrow Pit



Clay Spot



Closed Depression



Gravel Pit



Gravelly Spot



Landfill



Lava Flow



Marsh or swamp



Mine or Quarry



Miscellaneous Water



Perennial Water



Rock Outcrop



Saline Spot



Sandy Spot



Severely Eroded Spot



Sinkhole



Slide or Slip



Sodic Spot



Spoil Area



Stony Spot



Very Stony Spot



Wet Spot



Other



Special Line Features

Water Features



Streams and Canals

Transportation



Rails



Interstate Highways



US Routes



Major Roads



Local Roads

Background



Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service

Web Soil Survey URL:

Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Dutchess County, New York

Survey Area Data: Version 14, Oct 8, 2017

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Oct 7, 2013—Feb 26, 2017

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
KuA	Knickerbocker-Urban land complex, nearly level	0.4	100.0%
Totals for Area of Interest		0.4	100.0%

INFILTRATION TEST DATA

Name: 38 St. Lukes Subdivision City of Beacon Date: 5/11/2018

By: Adam Gasparre

Lot No.	Test Hole No.	Test Hole Depth	Soil Type	Soaked	TEST RUNS					
					*	1	2	3	4	5
2	1	96"	Brown sandy-Loam with Cob-bles	Yes	Finish	14:00	14:45	15:45		
					Start	1:20	14:00	14:45		
					Depth (in)	5.0"	5.0"	5.0"		
					Finish					
					Start					
					Depth (in)					
					Finish					
					Start					
					Depth (in)					
					Finish					
					Start					
					Depth (in)					

I, Daniel G. Koehler, the undersigned, certify that these percolation tests were done by myself or under my direction according to the standard procedure. The data and results presented are true and correct.

Dated: 05/11/2018

Signature: _____

License No. (P.E.) _____

DEEP TEST RESULTS

Date: 05/09/2018

Name of property: 38 St. Lukes Subdivision

City of Beacon

TAX GRID #

6	0	5	4	-	3	8	-	1	5	6	6	3	4
---	---	---	---	---	---	---	---	---	---	---	---	---	---

Owner of property: Beacon 226 Main Street LLC

Engineer: Hudson Land Design

Person directing test: Daniel G. Koehler P.E.; conducted by Adam Gasparre

HOLE #	LOT #	TOTAL DEPTH	ROCK DEPTH	WATER DEPTH	MOTTLING DEPTH	SOIL DESCRIPTION
1	2	96"	None Observed	None Observed	None Observed	0-6" Topsoil; 6"-96" Brown sandy Loam with Cobbles
2	2	96"	None Observed	None Observed	None Observed	0-6" Topsoil; 6"-96" Brown sandy Loam with Cobbles


General remarks (terrain; weather; springs, streams, etc.)

Sunny, 70 degrees.


HD-185

APPENDIX C



PRE-DEVELOPMENT HYDROLOGY CALCULATIONS



DA 1



DA 2



Routing Diagram for PRE DEV

Prepared by Hudson Land Design, P.C. , Printed 6/25/2018
HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

PRE DEV

Prepared by Hudson Land Design, P.C.

Printed 6/25/2018

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

Page 2

Area Listing (all nodes)

Area (acres)	CN	Description (subcatchment-numbers)
0.306	39	>75% Grass cover, Good, HSG A (1, 2)
0.069	98	Paved parking, HSG A (1, 2)
0.375	50	TOTAL AREA

PRE DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St. Lukes Pre Conditions

Type III 24-hr 1 YEAR Rainfall=2.61"

Printed 6/25/2018

Page 3

Summary for Subcatchment 1: DA 1


Runoff = 0.00 cfs @ 15.08 hrs, Volume= 0.000 af, Depth> 0.03"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 1 YEAR Rainfall=2.61"

Area (sf)	CN	Description
2,373	39	>75% Grass cover, Good, HSG A
629	98	Paved parking, HSG A
3,002	51	Weighted Average
2,373		79.05% Pervious Area
629		20.95% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 1: DA 1

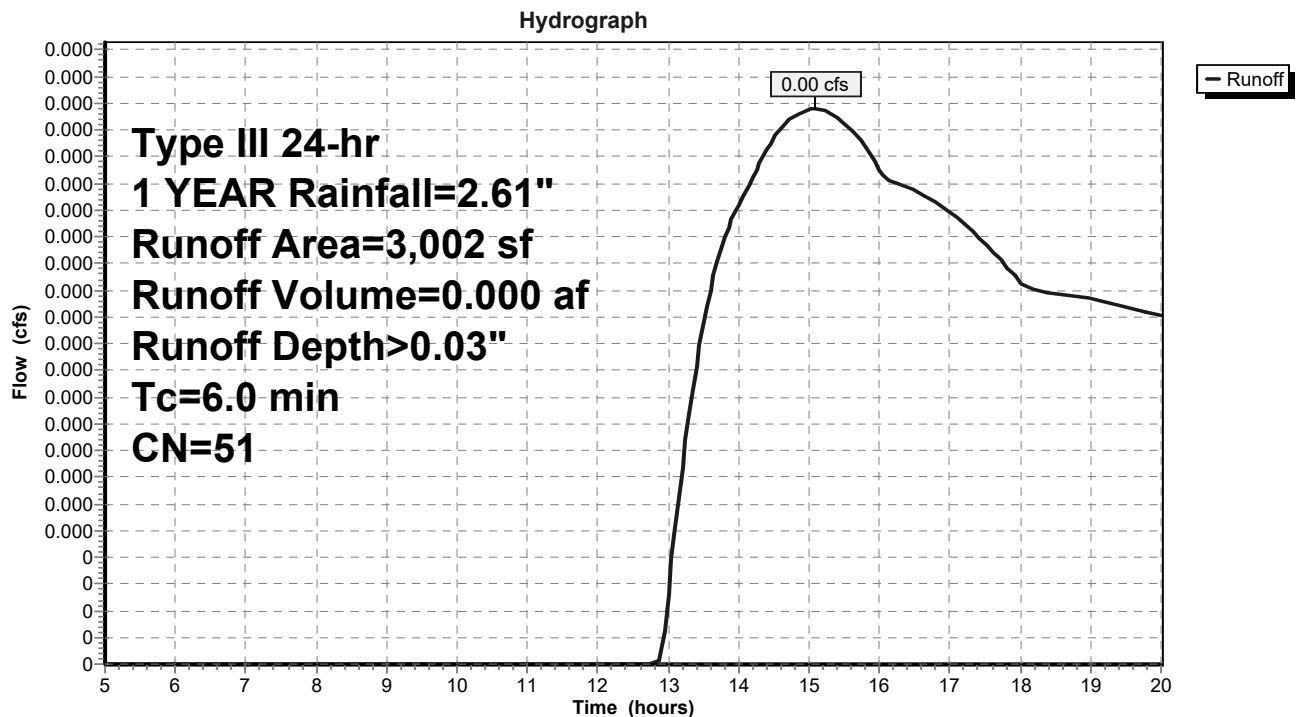

PRE DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St. Lukes Pre Conditions

Type III 24-hr 1 YEAR Rainfall=2.61"

Printed 6/25/2018

Page 4

Summary for Subcatchment 2: DA 2

Runoff = 0.00 cfs @ 15.38 hrs, Volume= 0.001 af, Depth> 0.02"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 1 YEAR Rainfall=2.61"

Area (sf)	CN	Description
2,390	98	Paved parking, HSG A
10,942	39	>75% Grass cover, Good, HSG A
13,332	50	Weighted Average
10,942		82.07% Pervious Area
2,390		17.93% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 2: DA 2

Hydrograph

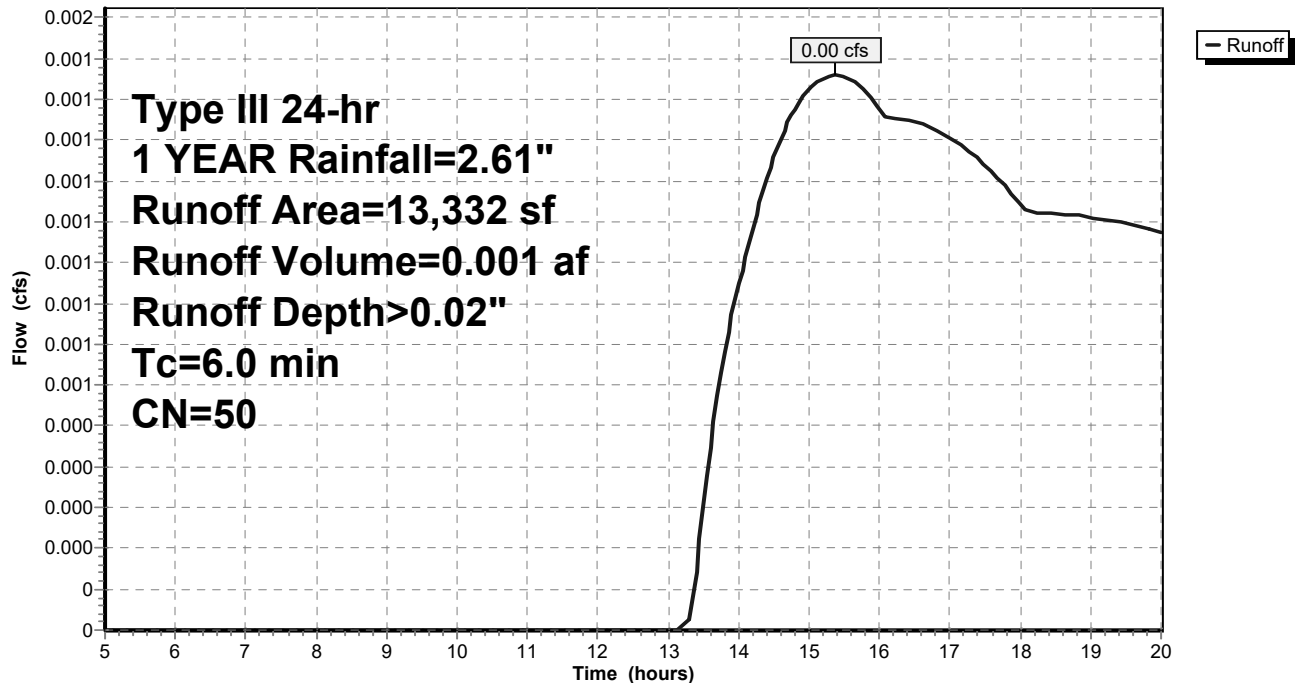

PRE DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St. Lukes Pre Conditions

Type III 24-hr 10 YEAR Rainfall=4.71"

Printed 6/25/2018

Page 5

Summary for Subcatchment 1: DA 1


Runoff = 0.03 cfs @ 12.13 hrs, Volume= 0.003 af, Depth> 0.55"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10 YEAR Rainfall=4.71"

Area (sf)	CN	Description
2,373	39	>75% Grass cover, Good, HSG A
629	98	Paved parking, HSG A
3,002	51	Weighted Average
2,373		79.05% Pervious Area
629		20.95% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 1: DA 1

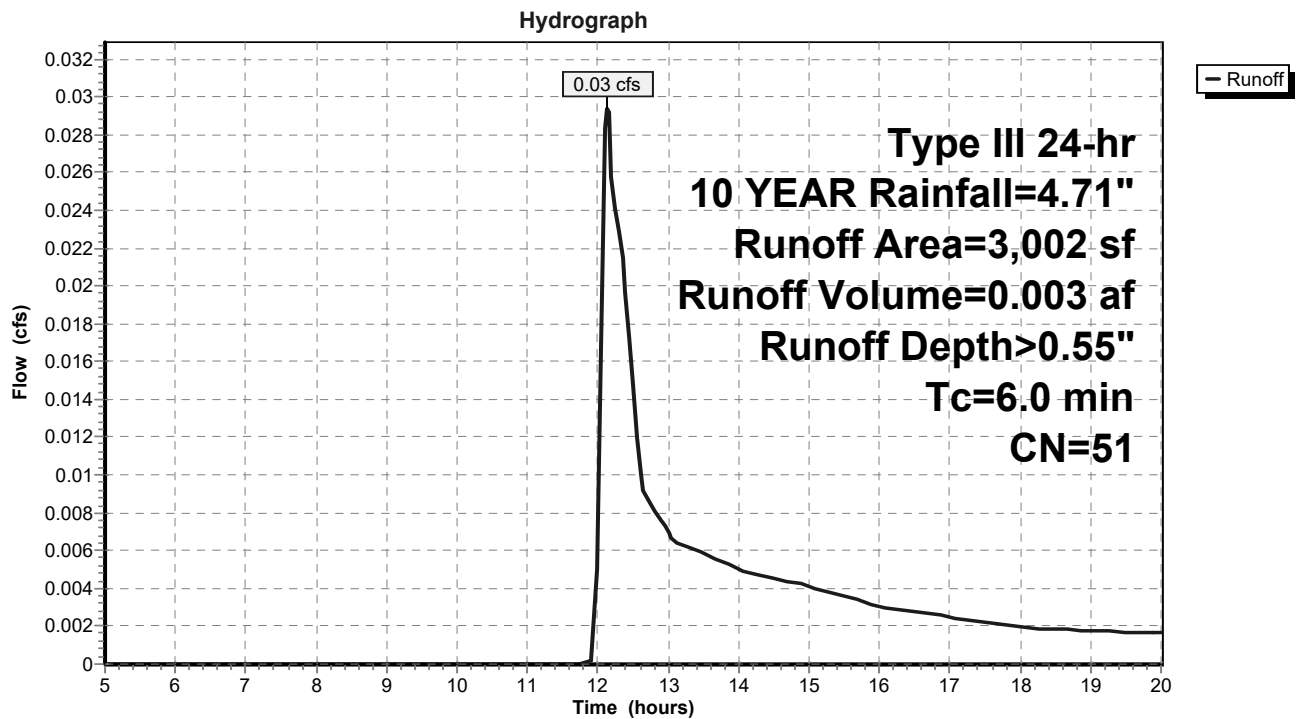

PRE DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St. Lukes Pre Conditions

Type III 24-hr 10 YEAR Rainfall=4.71"

Printed 6/25/2018

Page 6

Summary for Subcatchment 2: DA 2

Runoff = 0.11 cfs @ 12.15 hrs, Volume= 0.013 af, Depth> 0.50"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10 YEAR Rainfall=4.71"

Area (sf)	CN	Description
2,390	98	Paved parking, HSG A
10,942	39	>75% Grass cover, Good, HSG A
13,332	50	Weighted Average
10,942		82.07% Pervious Area
2,390		17.93% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 2: DA 2

Hydrograph

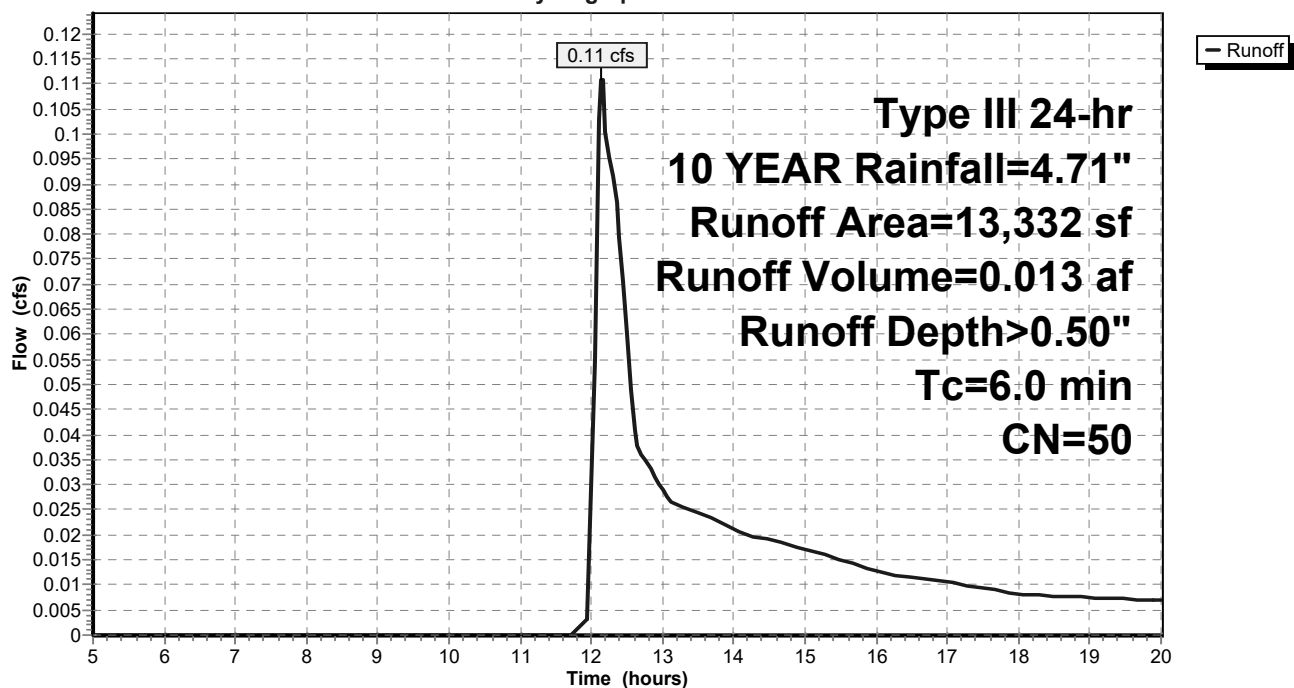

PRE DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St. Lukes Pre Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 7

Summary for Subcatchment 1: DA 1


Runoff = 0.08 cfs @ 12.11 hrs, Volume= 0.006 af, Depth> 1.05"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25 YEAR Rainfall=5.92"

Area (sf)	CN	Description
2,373	39	>75% Grass cover, Good, HSG A
629	98	Paved parking, HSG A
3,002	51	Weighted Average
2,373		79.05% Pervious Area
629		20.95% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 1: DA 1

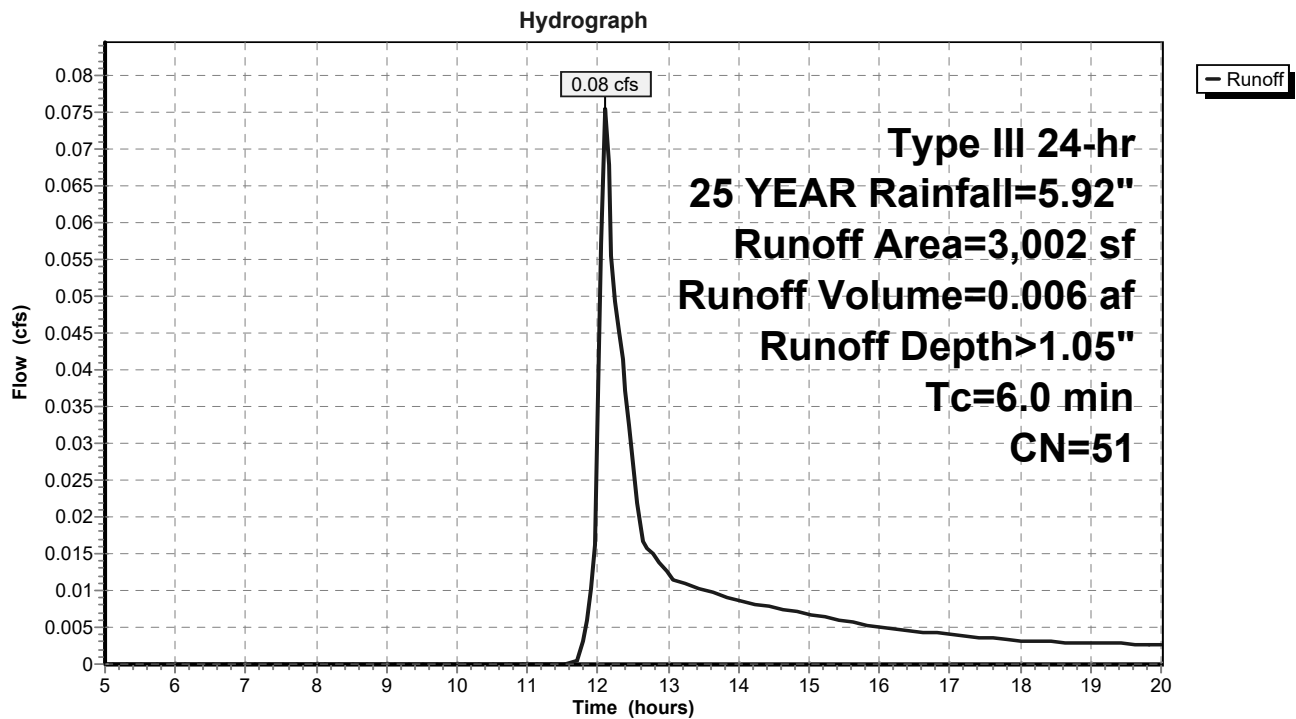

PRE DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St. Lukes Pre Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 8

Summary for Subcatchment 2: DA 2


Runoff = 0.30 cfs @ 12.11 hrs, Volume= 0.025 af, Depth> 0.98"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25 YEAR Rainfall=5.92"

Area (sf)	CN	Description
2,390	98	Paved parking, HSG A
10,942	39	>75% Grass cover, Good, HSG A
13,332	50	Weighted Average
10,942		82.07% Pervious Area
2,390		17.93% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 2: DA 2

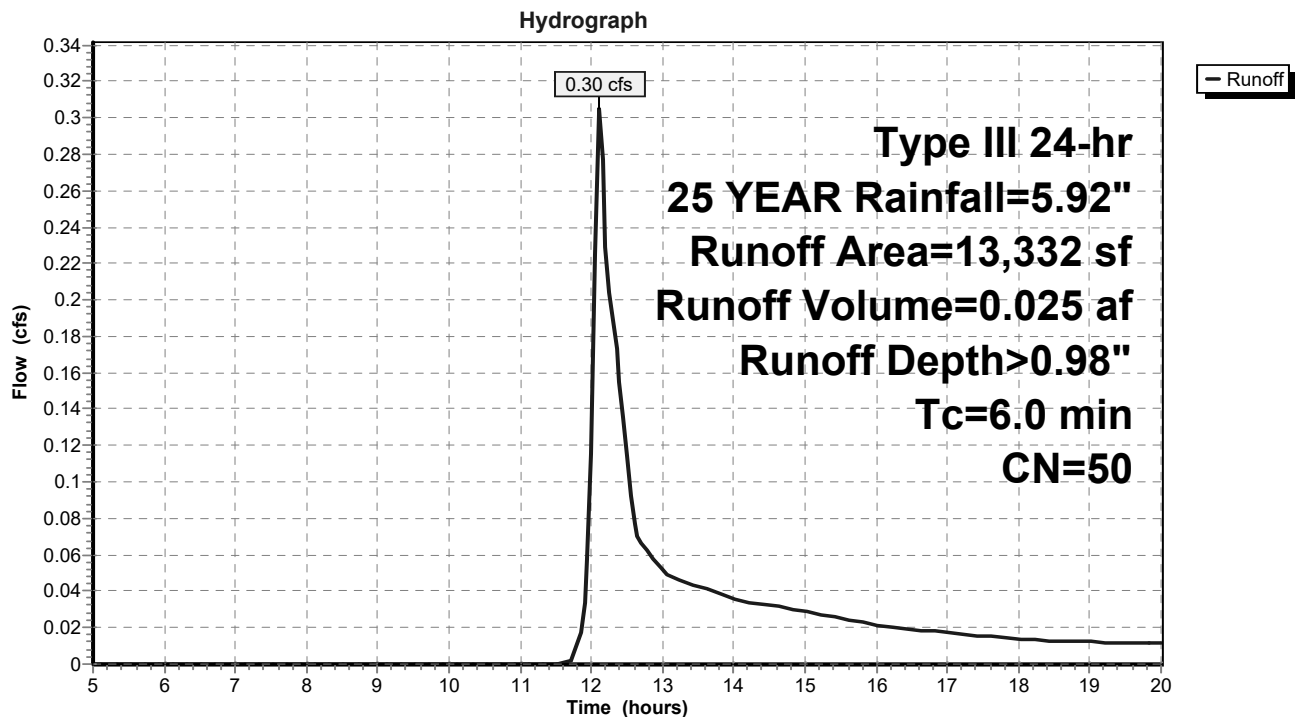

PRE DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St. Lukes Pre Conditions

Type III 24-hr 100 YEAR Rainfall=8.37"

Printed 6/25/2018

Page 9

Summary for Subcatchment 1: DA 1

Runoff = 0.19 cfs @ 12.10 hrs, Volume= 0.014 af, Depth> 2.36"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100 YEAR Rainfall=8.37"

Area (sf)	CN	Description
2,373	39	>75% Grass cover, Good, HSG A
629	98	Paved parking, HSG A
3,002	51	Weighted Average
2,373		79.05% Pervious Area
629		20.95% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 1: DA 1

Hydrograph

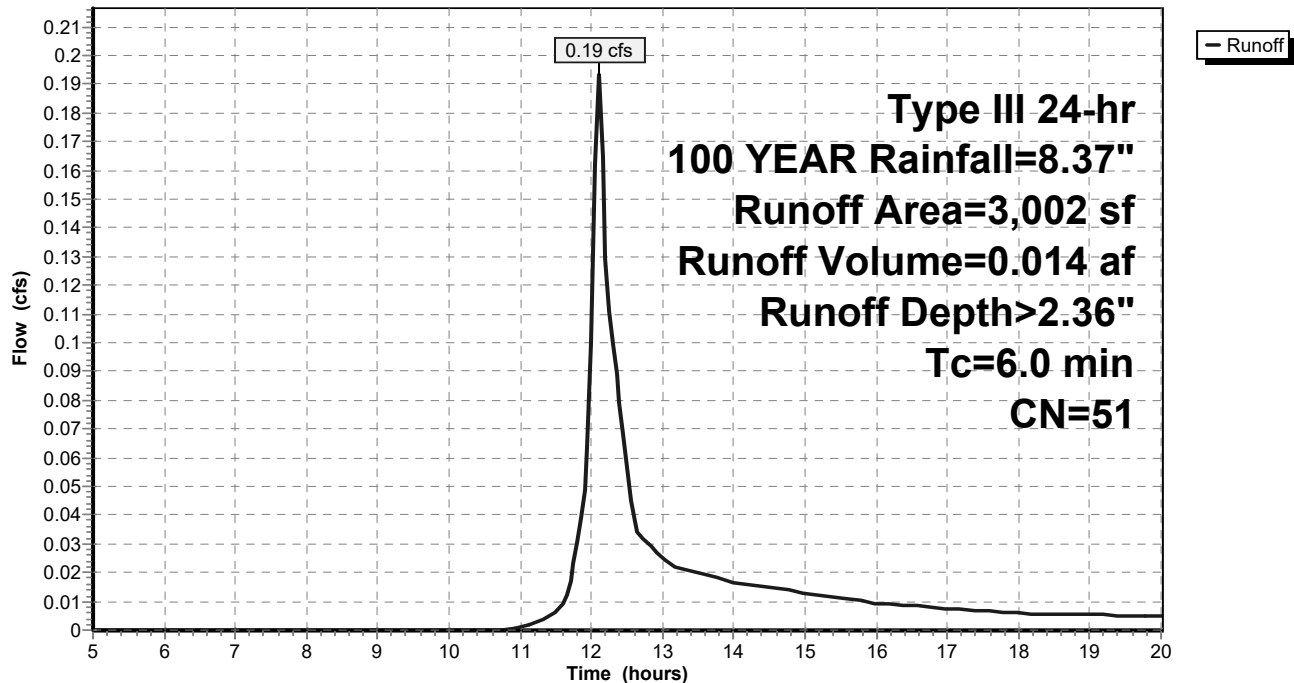

PRE DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St. Lukes Pre Conditions

Type III 24-hr 100 YEAR Rainfall=8.37"

Printed 6/25/2018

Page 10

Summary for Subcatchment 2: DA 2


Runoff = 0.81 cfs @ 12.10 hrs, Volume= 0.057 af, Depth> 2.25"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100 YEAR Rainfall=8.37"

Area (sf)	CN	Description
2,390	98	Paved parking, HSG A
10,942	39	>75% Grass cover, Good, HSG A
13,332	50	Weighted Average
10,942		82.07% Pervious Area
2,390		17.93% Impervious Area




Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 2: DA 2

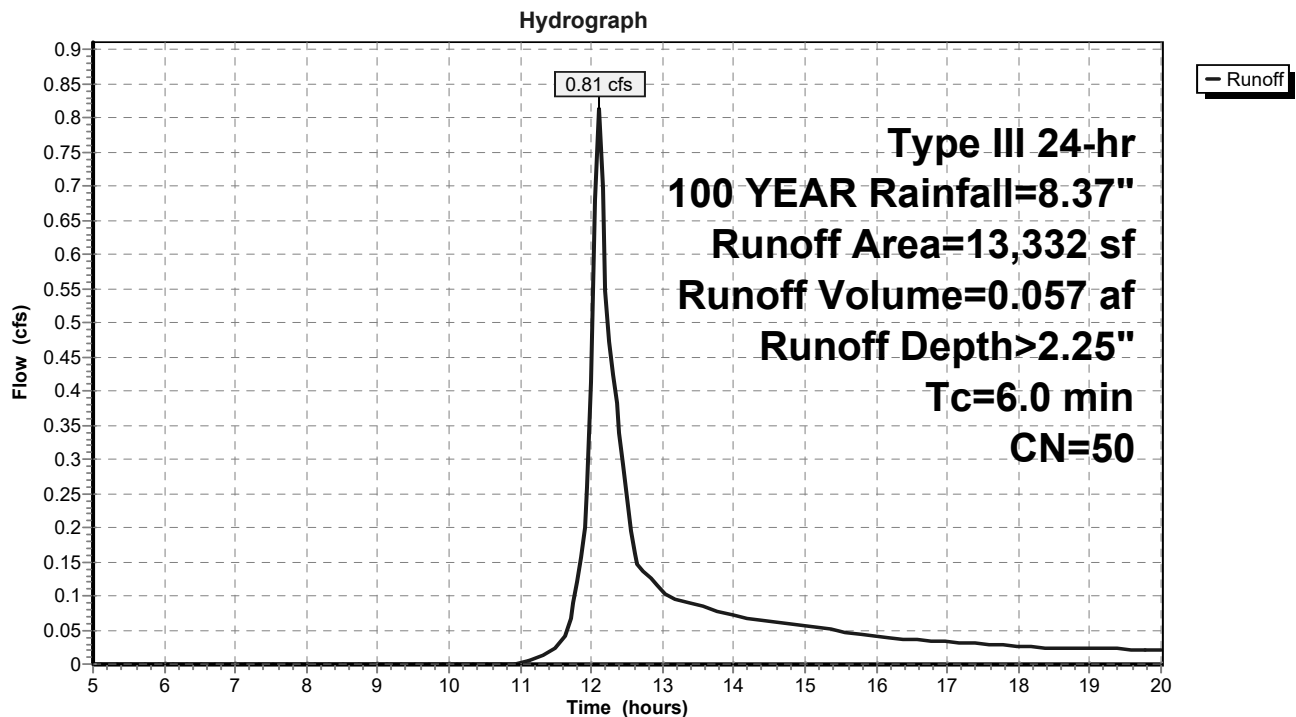

APPENDIX D

POST-DEVELOPMENT HYDROLOGY CALCULATIONS

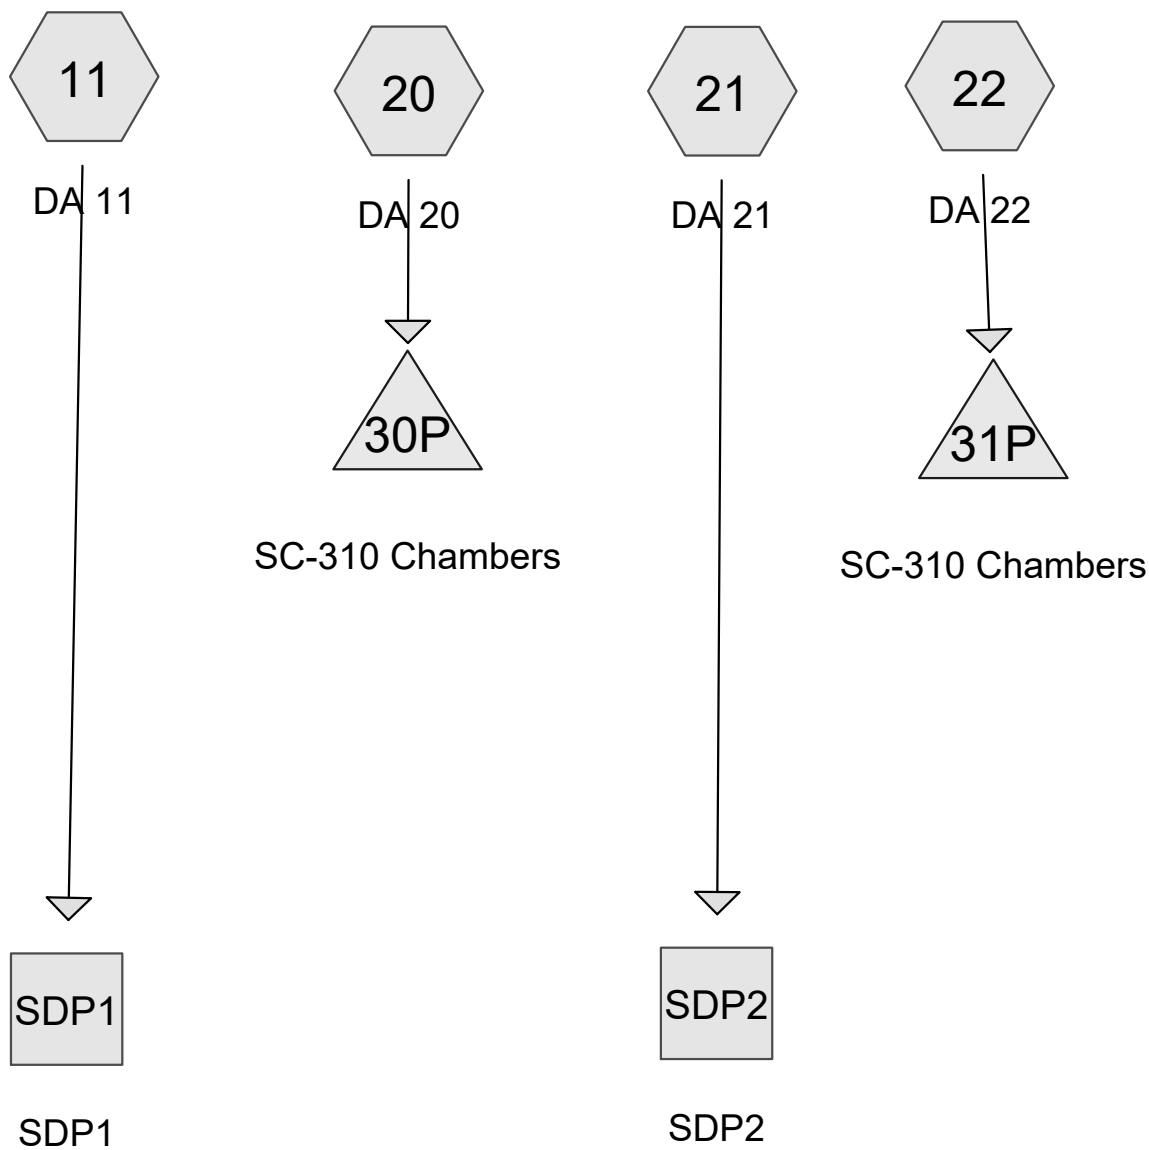

POST DEV

Prepared by Hudson Land Design, P.C.

Printed 6/25/2018

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

Page 2

Area Listing (all nodes)

Area (acres)	CN	Description (subcatchment-numbers)
0.221	39	>75% Grass cover, Good, HSG A (11, 20, 21, 22)
0.153	98	Paved parking, HSG A (11, 20, 21, 22)

POST DEV

Prepared by Hudson Land Design, P.C.

Printed 6/25/2018

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

Page 3

Soil Listing (all nodes)

Area (acres)	Soil Group	Subcatchment Numbers
0.375	HSG A	11, 20, 21, 22
0.000	HSG B	
0.000	HSG C	
0.000	HSG D	
0.000	Other	

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 4

Summary for Subcatchment 11: DA 11


Runoff = 0.00 cfs @ 13.68 hrs, Volume= 0.000 af, Depth> 0.07"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 1 YR Rainfall=2.61"

Area (sf)	CN	Description
624	98	Paved parking, HSG A
1,814	39	>75% Grass cover, Good, HSG A
2,438	54	Weighted Average
1,814		74.41% Pervious Area
624		25.59% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 11: DA 11

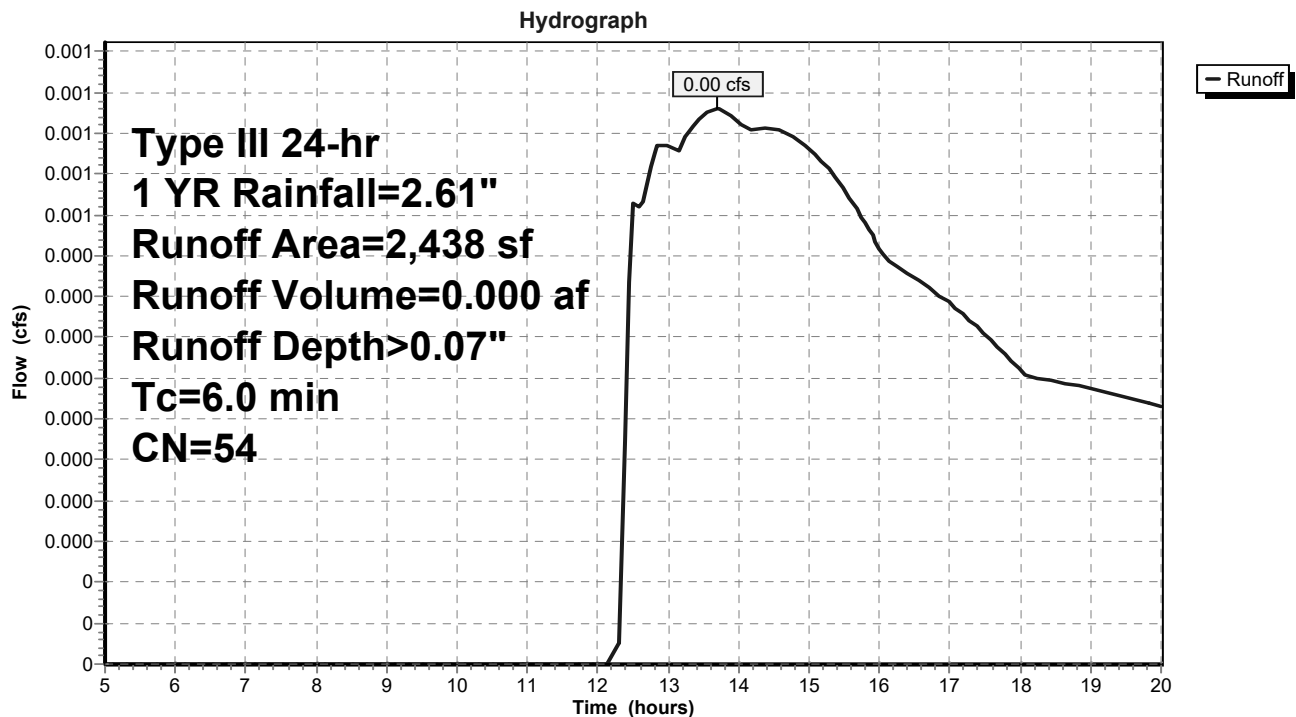

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 5

Summary for Subcatchment 20: DA 20


Runoff = 0.05 cfs @ 12.10 hrs, Volume= 0.004 af, Depth> 0.83"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 1 YR Rainfall=2.61"

Area (sf)	CN	Description
1,538	98	Paved parking, HSG A
724	39	>75% Grass cover, Good, HSG A
2,262	79	Weighted Average
724		32.01% Pervious Area
1,538		67.99% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 20: DA 20

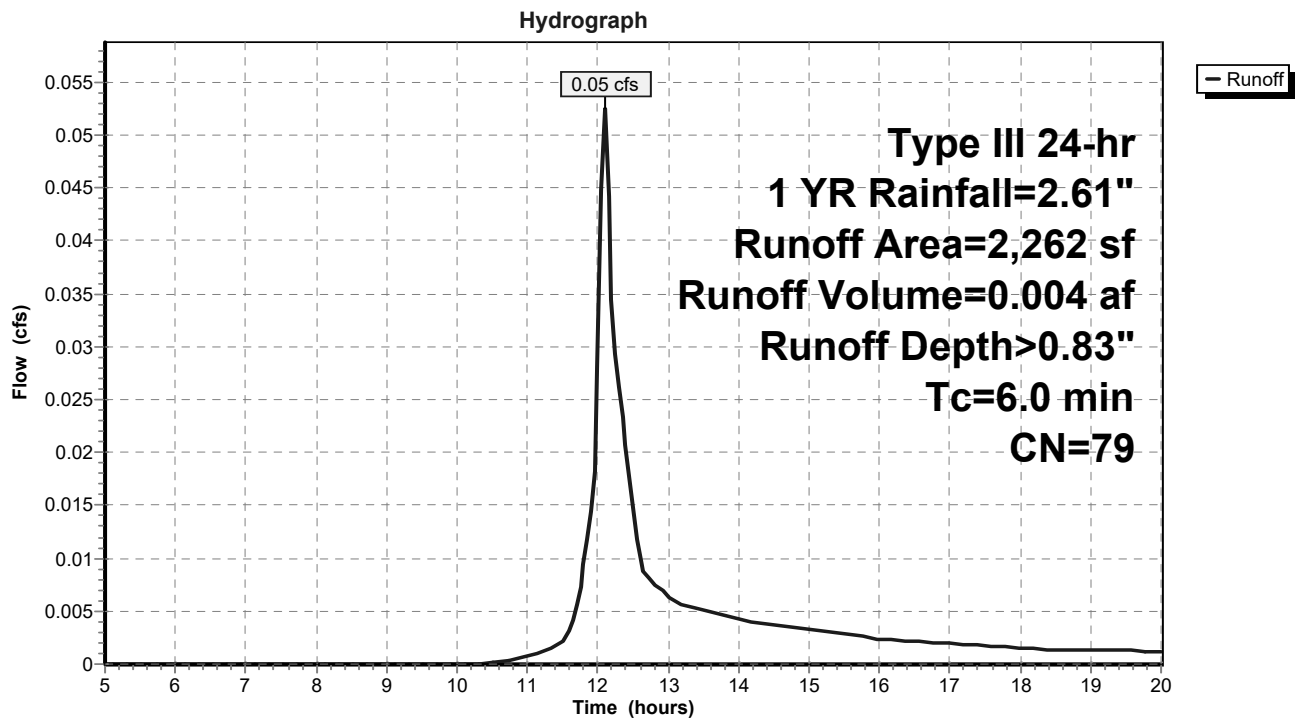

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 6

Summary for Subcatchment 21: DA 21


Runoff = 0.00 cfs @ 12.48 hrs, Volume= 0.001 af, Depth> 0.08"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 1 YR Rainfall=2.61"

Area (sf)	CN	Description
1,838	98	Paved parking, HSG A
4,816	39	>75% Grass cover, Good, HSG A
6,654	55	Weighted Average
4,816		72.38% Pervious Area
1,838		27.62% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 21: DA 21

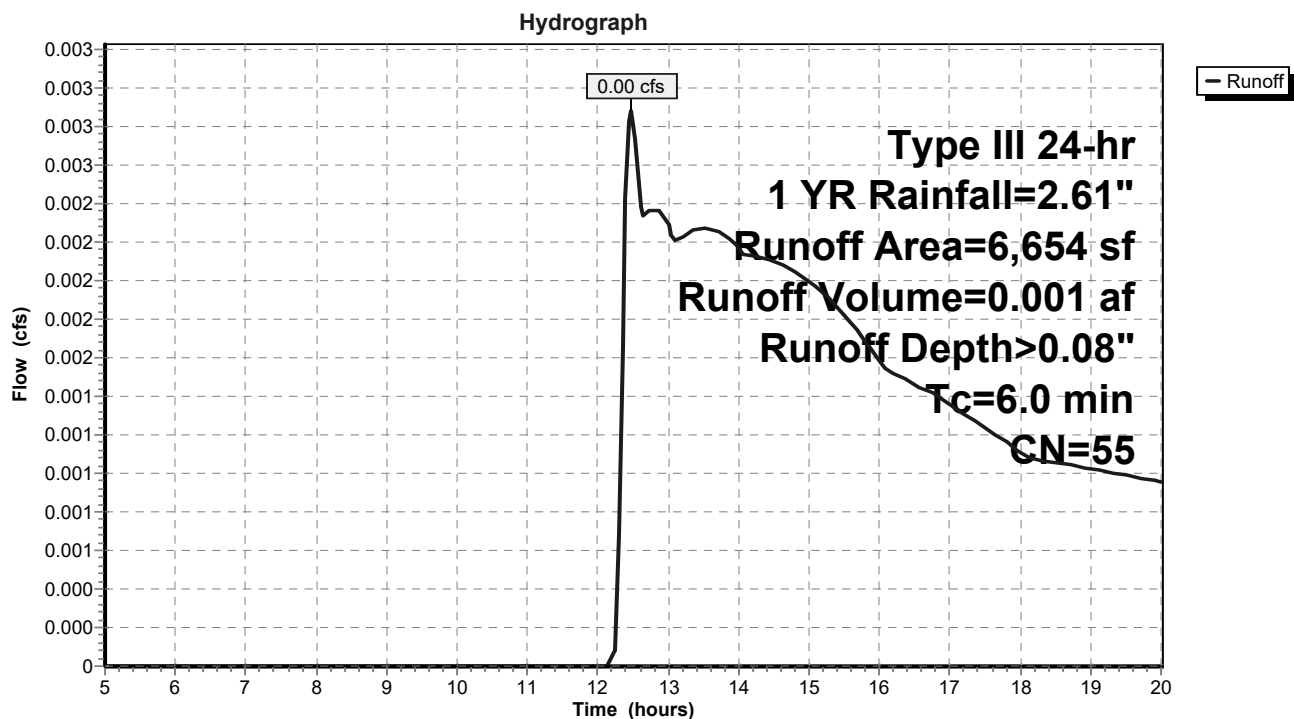

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 7

Summary for Subcatchment 22: DA 22


Runoff = 0.06 cfs @ 12.11 hrs, Volume= 0.005 af, Depth> 0.49"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 1 YR Rainfall=2.61"

Area (sf)	CN	Description
2,686	98	Paved parking, HSG A
2,290	39	>75% Grass cover, Good, HSG A
4,976	71	Weighted Average
2,290		46.02% Pervious Area
2,686		53.98% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 22: DA 22

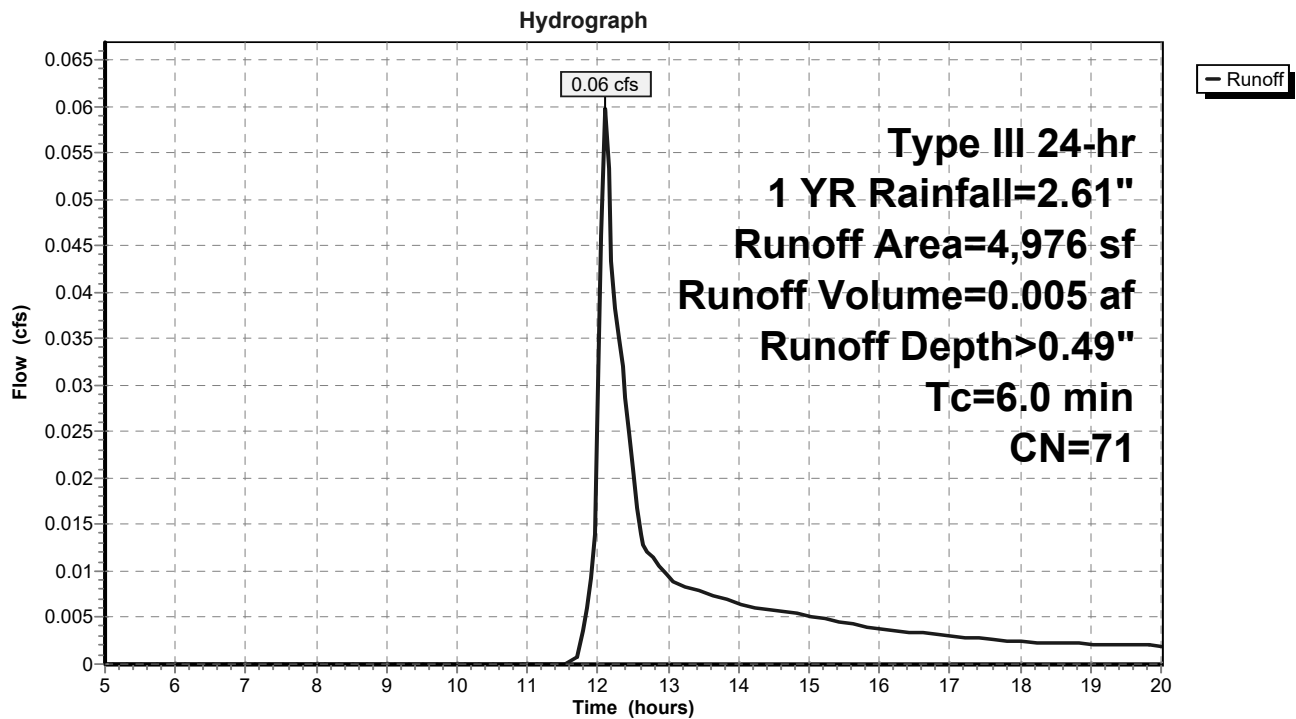

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 8


Summary for Reach SDP1: SDP1

Inflow Area = 0.056 ac, 25.59% Impervious, Inflow Depth > 0.07" for 1 YR event
Inflow = 0.00 cfs @ 13.68 hrs, Volume= 0.000 af
Outflow = 0.00 cfs @ 13.68 hrs, Volume= 0.000 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach SDP1: SDP1

Hydrograph

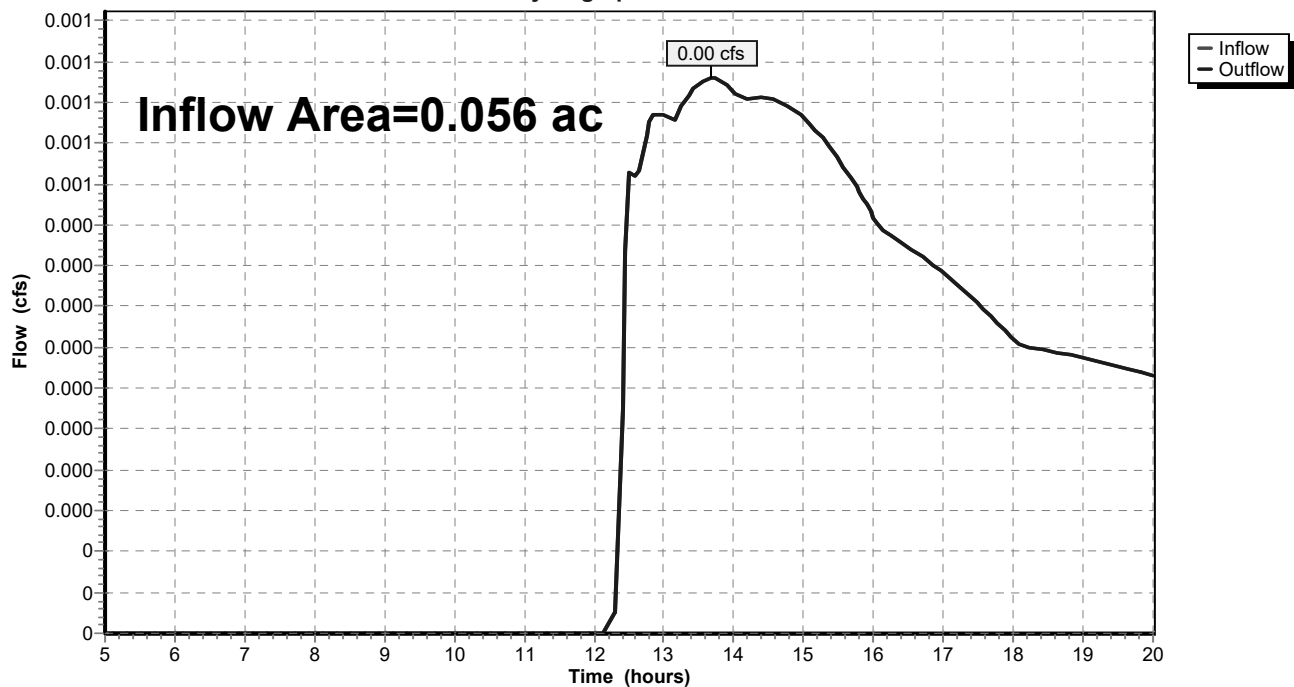

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 9


Summary for Reach SDP2: SDP2

Inflow Area = 0.153 ac, 27.62% Impervious, Inflow Depth > 0.08" for 1 YR event
Inflow = 0.00 cfs @ 12.48 hrs, Volume= 0.001 af
Outflow = 0.00 cfs @ 12.48 hrs, Volume= 0.001 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach SDP2: SDP2

Hydrograph

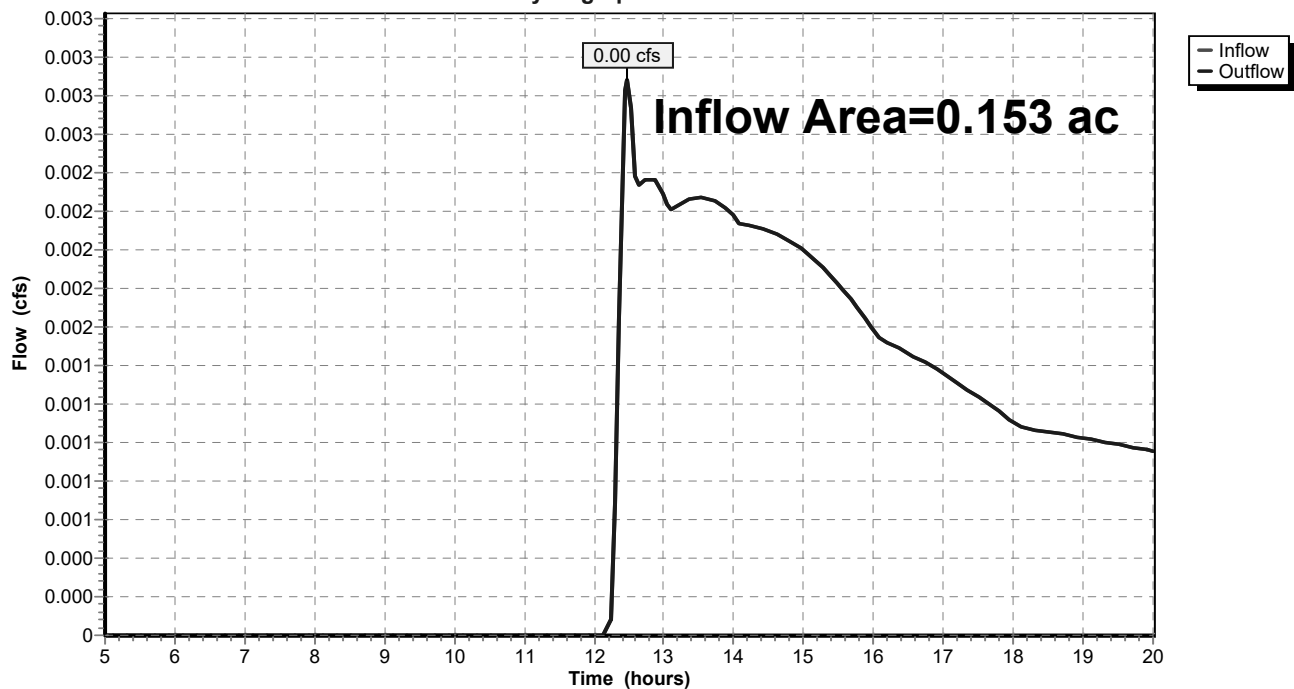

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 10

Summary for Pond 30P: SC-310 Chambers

Inflow Area = 0.052 ac, 67.99% Impervious, Inflow Depth > 0.83" for 1 YR event
 Inflow = 0.05 cfs @ 12.10 hrs, Volume= 0.004 af
 Outflow = 0.02 cfs @ 12.36 hrs, Volume= 0.004 af, Atten= 57%, Lag= 15.9 min
 Discarded = 0.02 cfs @ 12.36 hrs, Volume= 0.004 af

Routing by Stor-Ind method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Peak Elev= 138.98' @ 12.36 hrs Surf.Area= 0.004 ac Storage= 0.000 af

Plug-Flow detention time= 5.5 min calculated for 0.004 af (100% of inflow)
 Center-of-Mass det. time= 5.2 min (820.1 - 814.9)

Volume	Invert	Avail.Storage	Storage Description
#1	138.70'	0.004 af	11.50'W x 16.23'L x 3.00'H Prismatic 0.013 af Overall - 0.002 af Embedded = 0.011 af x 40.0% Voids
#2	139.20'	0.002 af	ADS_StormTech SC-310 x 6 Inside #1 Effective Size= 28.9"W x 16.0"H => 2.07 sf x 7.12'L = 14.7 cf Overall Size= 34.0"W x 16.0"H x 7.56'L with 0.44' Overlap Row Length Adjustment= +0.44' x 2.07 sf x 3 rows
		0.006 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Discarded	138.70'	5.000 in/hr Exfiltration over Surface area Conductivity to Groundwater Elevation = 133.00' Phase-In= 0.01'

Discarded OutFlow Max=0.02 cfs @ 12.36 hrs HW=138.98' (Free Discharge)

↑**1=Exfiltration** (Controls 0.02 cfs)

POST DEV

Prepared by Hudson Land Design, P.C.


HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 11

Pond 30P: SC-310 Chambers

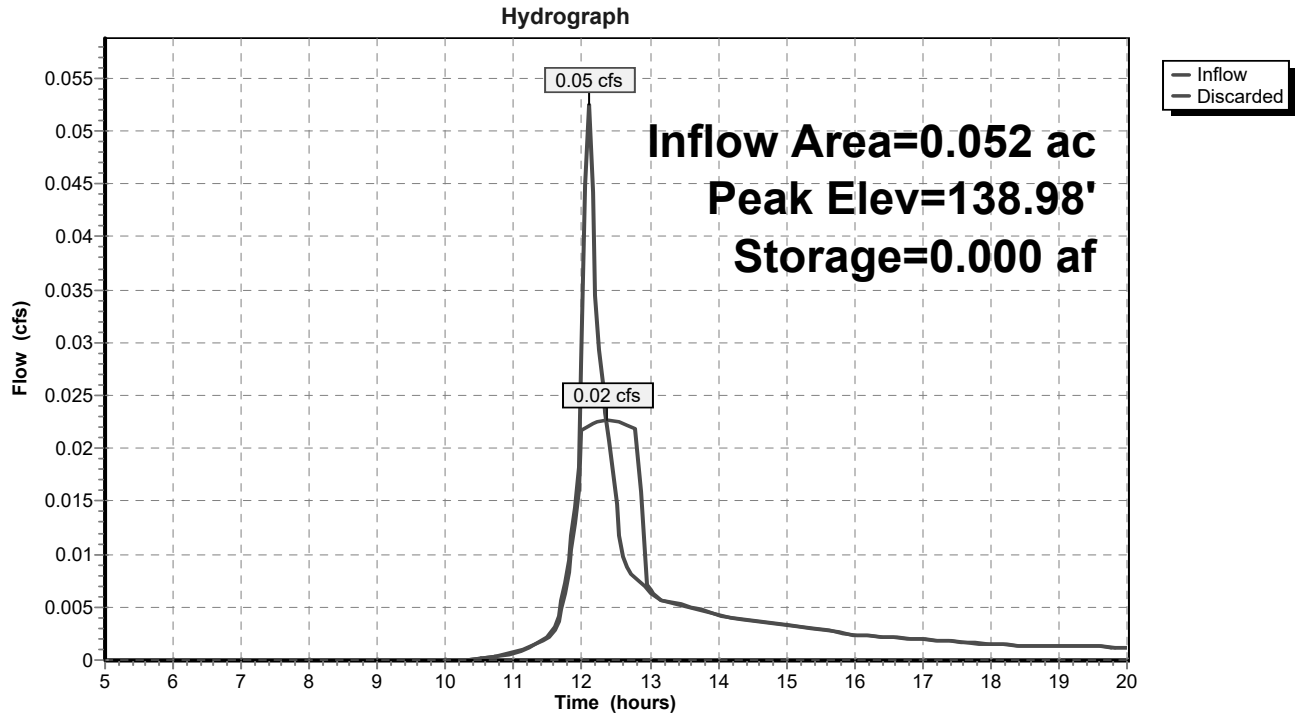

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 12

Summary for Pond 31P: SC-310 Chambers

Inflow Area = 0.114 ac, 53.98% Impervious, Inflow Depth > 0.49" for 1 YR event
 Inflow = 0.06 cfs @ 12.11 hrs, Volume= 0.005 af
 Outflow = 0.04 cfs @ 12.30 hrs, Volume= 0.005 af, Atten= 41%, Lag= 11.2 min
 Discarded = 0.04 cfs @ 12.30 hrs, Volume= 0.005 af

Routing by Stor-Ind method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Peak Elev= 137.62' @ 12.30 hrs Surf.Area= 0.007 ac Storage= 0.000 af

Plug-Flow detention time= 2.9 min calculated for 0.005 af (100% of inflow)
 Center-of-Mass det. time= 2.5 min (840.2 - 837.7)

Volume	Invert	Avail.Storage	Storage Description
#1	137.50'	0.007 af	18.20'W x 16.23'L x 3.00'H Prismatic 0.020 af Overall - 0.003 af Embedded = 0.017 af x 40.0% Voids
#2	138.00'	0.003 af	ADS_StormTech SC-310 x 10 Inside #1 Effective Size= 28.9"W x 16.0"H => 2.07 sf x 7.12'L = 14.7 cf Overall Size= 34.0"W x 16.0"H x 7.56'L with 0.44' Overlap Row Length Adjustment= +0.44' x 2.07 sf x 5 rows
		0.010 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Discarded	137.50'	5.000 in/hr Exfiltration over Surface area Conductivity to Groundwater Elevation = 134.00'

Discarded OutFlow Max=0.04 cfs @ 12.30 hrs HW=137.62' (Free Discharge)

↑ **1=Exfiltration** (Controls 0.04 cfs)

POST DEV

Prepared by Hudson Land Design, P.C.


HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 1 YR Rainfall=2.61"

Printed 6/25/2018

Page 13

Pond 31P: SC-310 Chambers

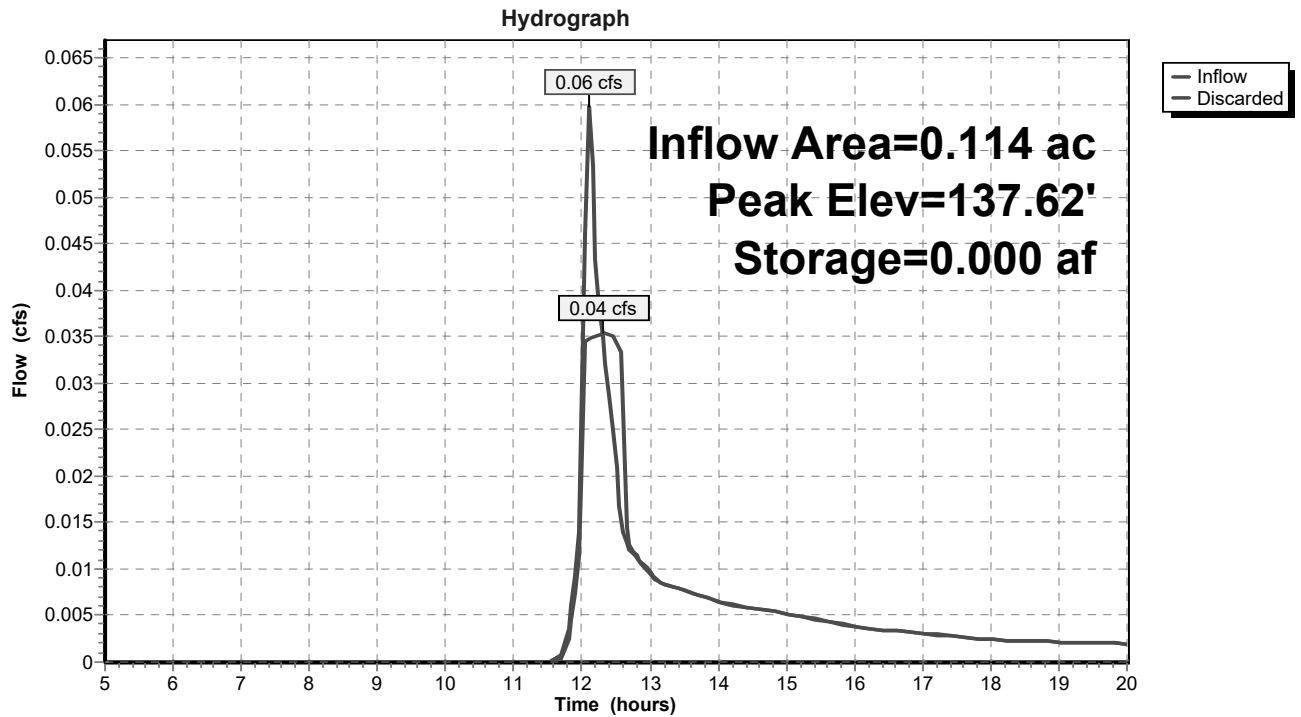

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 14

Summary for Subcatchment 11: DA 11


Runoff = 0.04 cfs @ 12.12 hrs, Volume= 0.003 af, Depth> 0.69"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10 YR Rainfall=4.71"

Area (sf)	CN	Description
624	98	Paved parking, HSG A
1,814	39	>75% Grass cover, Good, HSG A
2,438	54	Weighted Average
1,814		74.41% Pervious Area
624		25.59% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 11: DA 11

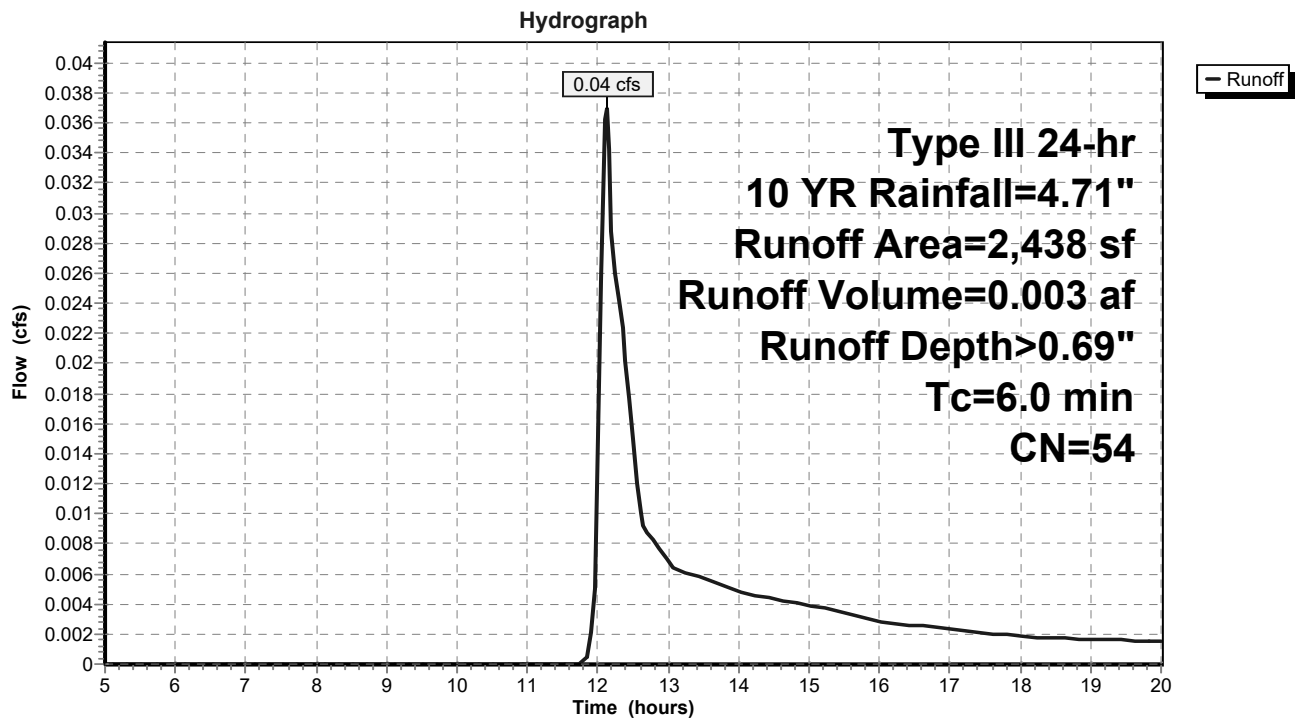

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 15

Summary for Subcatchment 20: DA 20


Runoff = 0.15 cfs @ 12.09 hrs, Volume= 0.010 af, Depth> 2.38"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10 YR Rainfall=4.71"

Area (sf)	CN	Description
1,538	98	Paved parking, HSG A
724	39	>75% Grass cover, Good, HSG A
2,262	79	Weighted Average
724		32.01% Pervious Area
1,538		67.99% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 20: DA 20

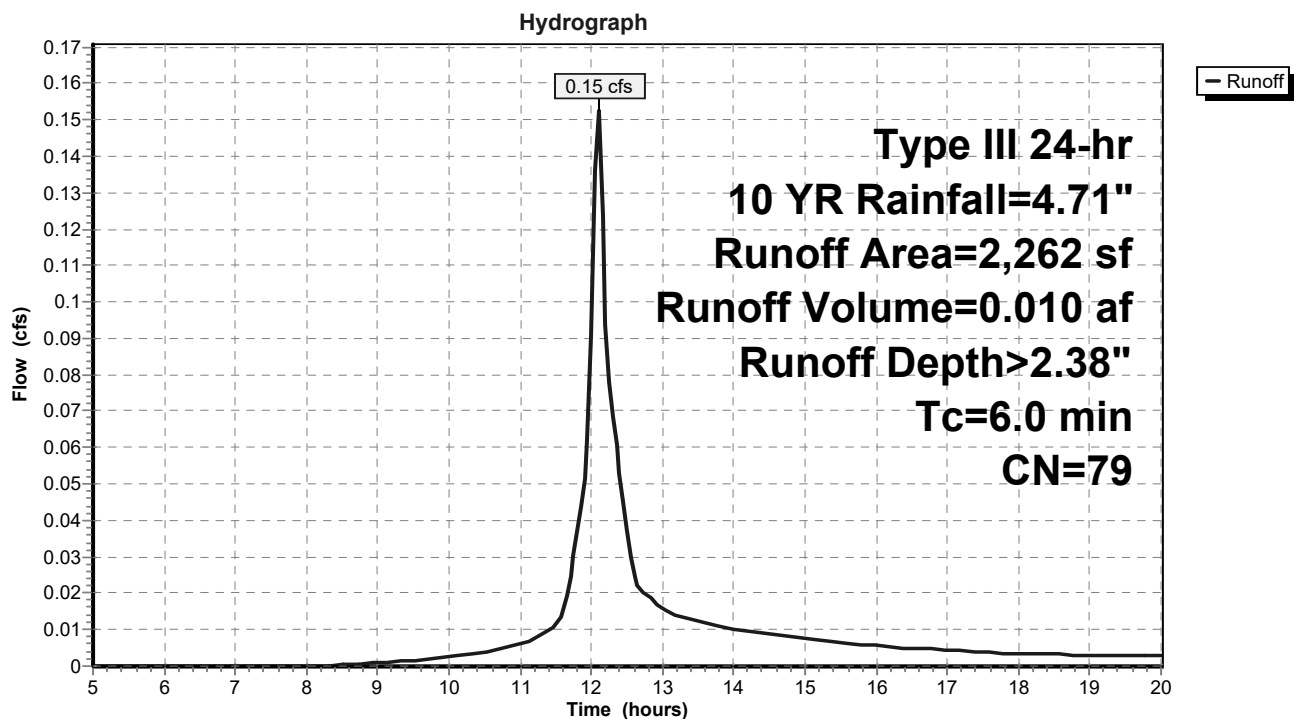

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 16

Summary for Subcatchment 21: DA 21


Runoff = 0.11 cfs @ 12.11 hrs, Volume= 0.009 af, Depth> 0.74"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10 YR Rainfall=4.71"

Area (sf)	CN	Description
1,838	98	Paved parking, HSG A
4,816	39	>75% Grass cover, Good, HSG A
6,654	55	Weighted Average
4,816		72.38% Pervious Area
1,838		27.62% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 21: DA 21

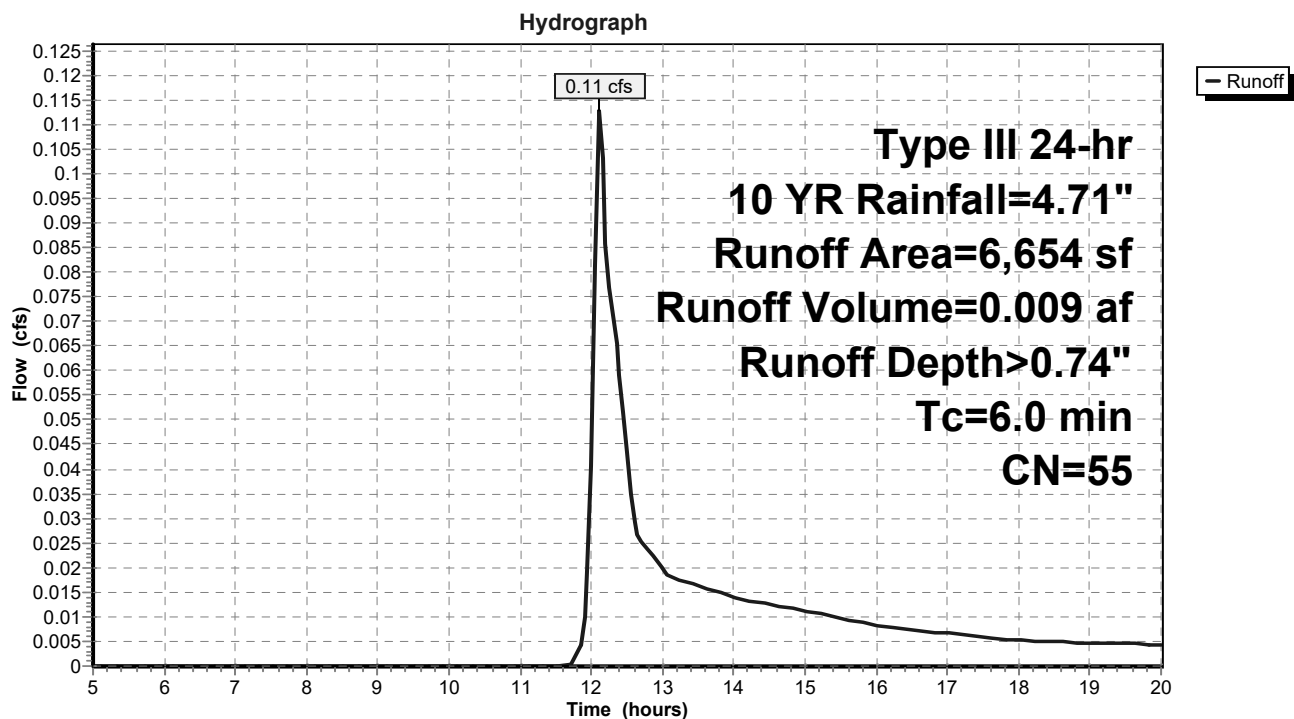

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 17

Summary for Subcatchment 22: DA 22


Runoff = 0.25 cfs @ 12.10 hrs, Volume= 0.017 af, Depth> 1.75"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 10 YR Rainfall=4.71"

Area (sf)	CN	Description
2,686	98	Paved parking, HSG A
2,290	39	>75% Grass cover, Good, HSG A
4,976	71	Weighted Average
2,290		46.02% Pervious Area
2,686		53.98% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 22: DA 22

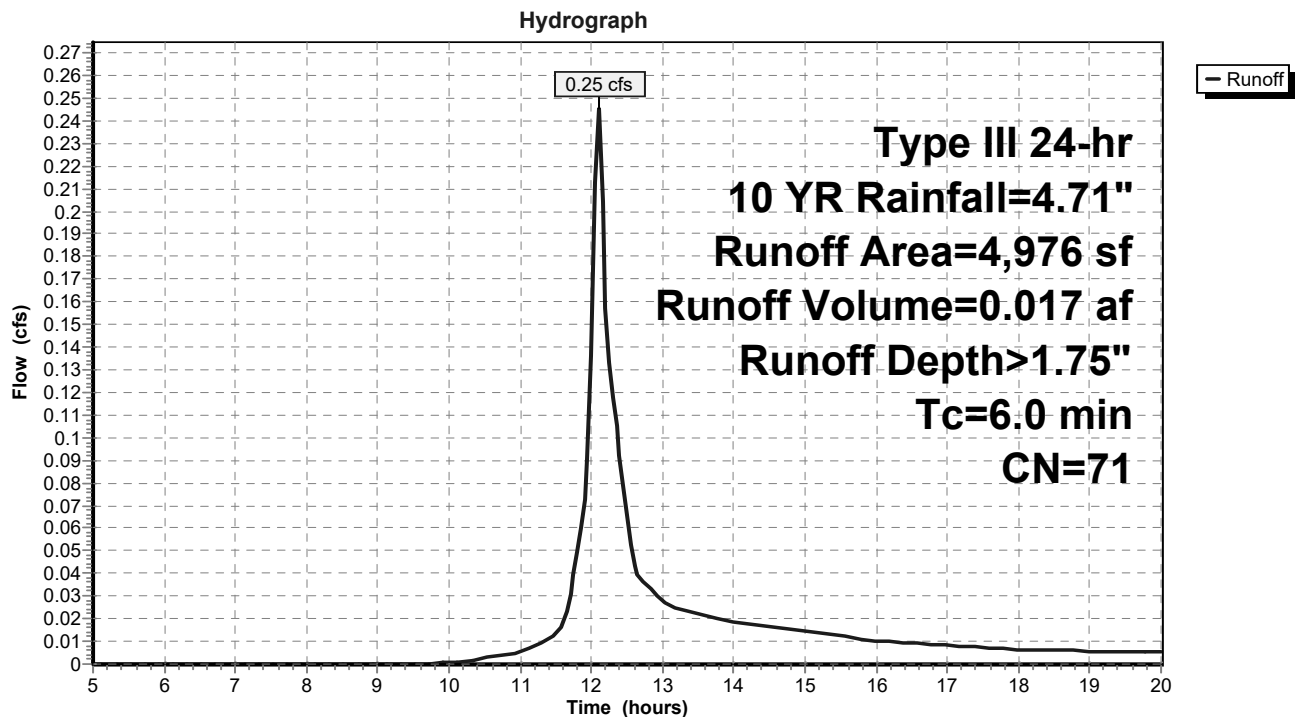

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 18


Summary for Reach SDP1: SDP1

Inflow Area = 0.056 ac, 25.59% Impervious, Inflow Depth > 0.69" for 10 YR event
Inflow = 0.04 cfs @ 12.12 hrs, Volume= 0.003 af
Outflow = 0.04 cfs @ 12.12 hrs, Volume= 0.003 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach SDP1: SDP1

Hydrograph

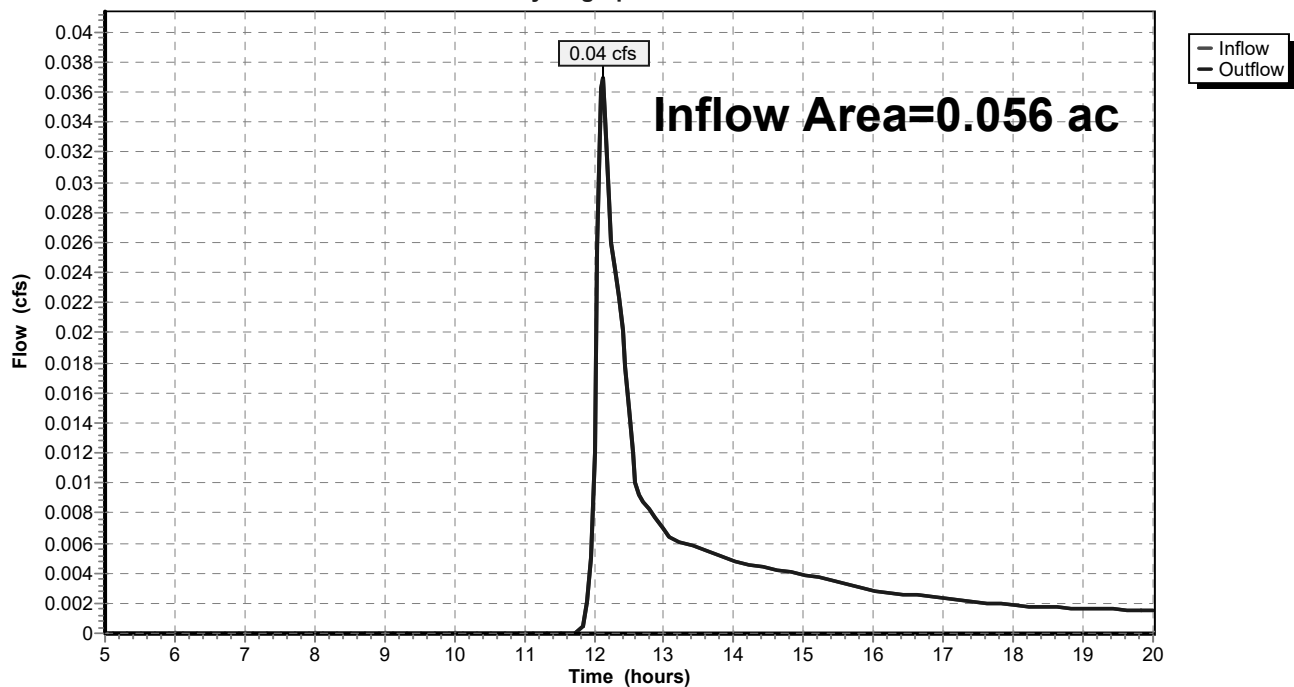

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 19


Summary for Reach SDP2: SDP2

Inflow Area = 0.153 ac, 27.62% Impervious, Inflow Depth > 0.74" for 10 YR event
Inflow = 0.11 cfs @ 12.11 hrs, Volume= 0.009 af
Outflow = 0.11 cfs @ 12.11 hrs, Volume= 0.009 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach SDP2: SDP2

Hydrograph

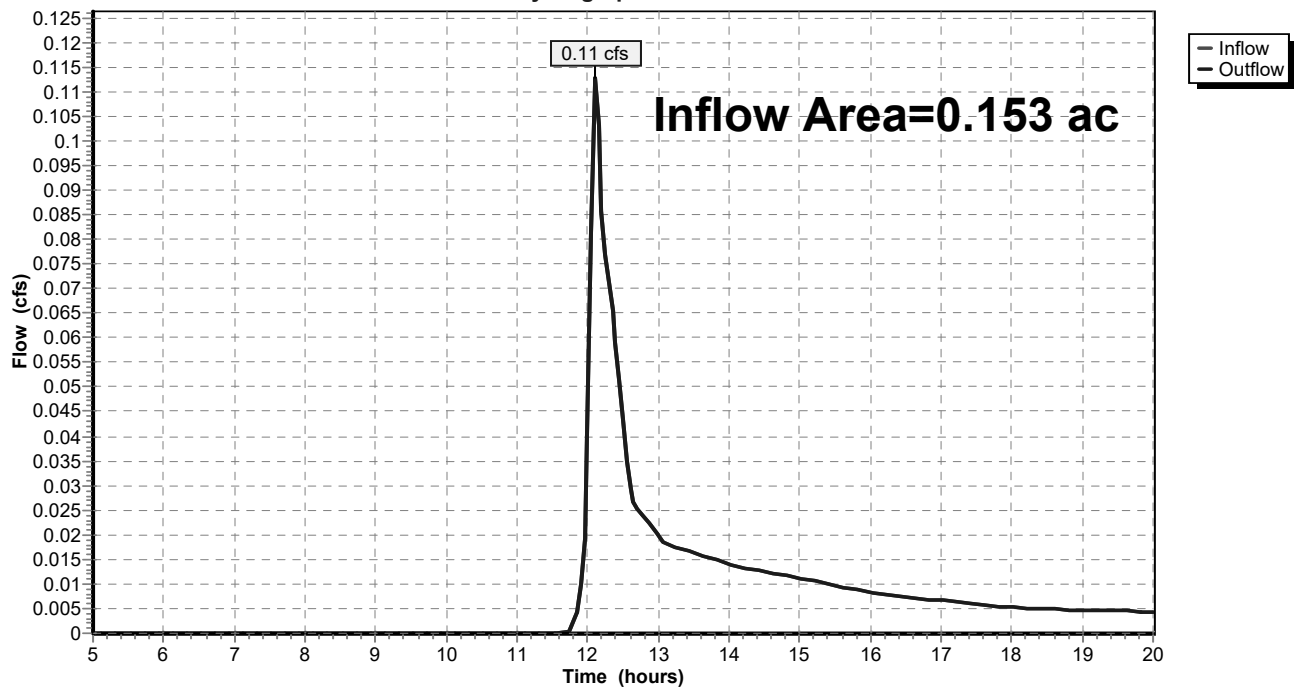

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 20

Summary for Pond 30P: SC-310 Chambers

Inflow Area = 0.052 ac, 67.99% Impervious, Inflow Depth > 2.38" for 10 YR event
 Inflow = 0.15 cfs @ 12.09 hrs, Volume= 0.010 af
 Outflow = 0.03 cfs @ 12.58 hrs, Volume= 0.010 af, Atten= 83%, Lag= 29.2 min
 Discarded = 0.03 cfs @ 12.58 hrs, Volume= 0.010 af

Routing by Stor-Ind method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Peak Elev= 140.01' @ 12.58 hrs Surf.Area= 0.004 ac Storage= 0.003 af

Plug-Flow detention time= 40.4 min calculated for 0.010 af (100% of inflow)
 Center-of-Mass det. time= 40.1 min (831.4 - 791.3)

Volume	Invert	Avail.Storage	Storage Description
#1	138.70'	0.004 af	11.50'W x 16.23'L x 3.00'H Prismatic 0.013 af Overall - 0.002 af Embedded = 0.011 af x 40.0% Voids
#2	139.20'	0.002 af	ADS_StormTech SC-310 x 6 Inside #1 Effective Size= 28.9"W x 16.0"H => 2.07 sf x 7.12'L = 14.7 cf Overall Size= 34.0"W x 16.0"H x 7.56'L with 0.44' Overlap Row Length Adjustment= +0.44' x 2.07 sf x 3 rows
		0.006 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Discarded	138.70'	5.000 in/hr Exfiltration over Surface area Conductivity to Groundwater Elevation = 133.00' Phase-In= 0.01'

Discarded OutFlow Max=0.03 cfs @ 12.58 hrs HW=140.01' (Free Discharge)

↑**1=Exfiltration** (Controls 0.03 cfs)

POST DEV

Prepared by Hudson Land Design, P.C.


HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 21

Pond 30P: SC-310 Chambers

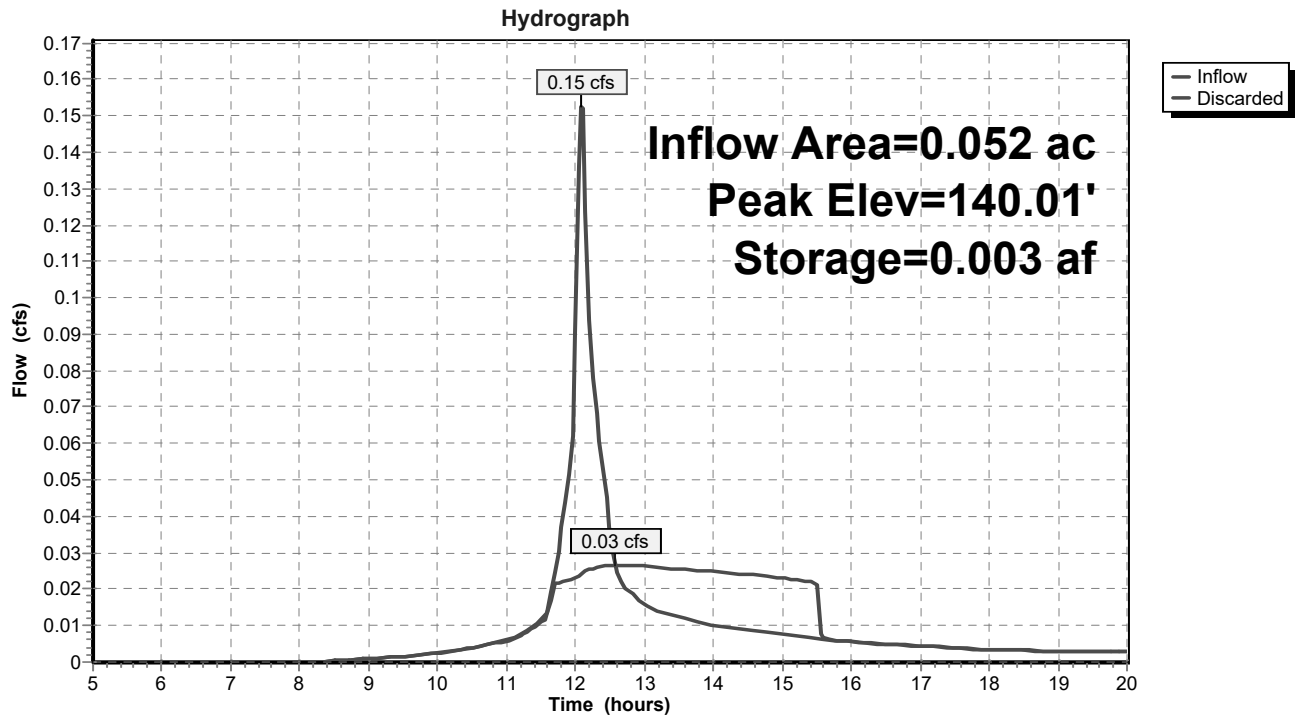

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 22

Summary for Pond 31P: SC-310 Chambers

Inflow Area = 0.114 ac, 53.98% Impervious, Inflow Depth > 1.75" for 10 YR event
 Inflow = 0.25 cfs @ 12.10 hrs, Volume= 0.017 af
 Outflow = 0.05 cfs @ 12.58 hrs, Volume= 0.017 af, Atten= 81%, Lag= 29.2 min
 Discarded = 0.05 cfs @ 12.58 hrs, Volume= 0.017 af

Routing by Stor-Ind method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Peak Elev= 138.77' @ 12.58 hrs Surf.Area= 0.007 ac Storage= 0.005 af

Plug-Flow detention time= 37.7 min calculated for 0.017 af (100% of inflow)
 Center-of-Mass det. time= 37.4 min (845.4 - 807.9)

Volume	Invert	Avail.Storage	Storage Description
#1	137.50'	0.007 af	18.20'W x 16.23'L x 3.00'H Prismatic 0.020 af Overall - 0.003 af Embedded = 0.017 af x 40.0% Voids
#2	138.00'	0.003 af	ADS_StormTech SC-310 x 10 Inside #1 Effective Size= 28.9"W x 16.0"H => 2.07 sf x 7.12'L = 14.7 cf Overall Size= 34.0"W x 16.0"H x 7.56'L with 0.44' Overlap Row Length Adjustment= +0.44' x 2.07 sf x 5 rows
		0.010 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Discarded	137.50'	5.000 in/hr Exfiltration over Surface area Conductivity to Groundwater Elevation = 134.00'

Discarded OutFlow Max=0.05 cfs @ 12.58 hrs HW=138.77' (Free Discharge)

↑**1=Exfiltration** (Controls 0.05 cfs)

POST DEV

Prepared by Hudson Land Design, P.C.


HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 10 YR Rainfall=4.71"

Printed 6/25/2018

Page 23

Pond 31P: SC-310 Chambers

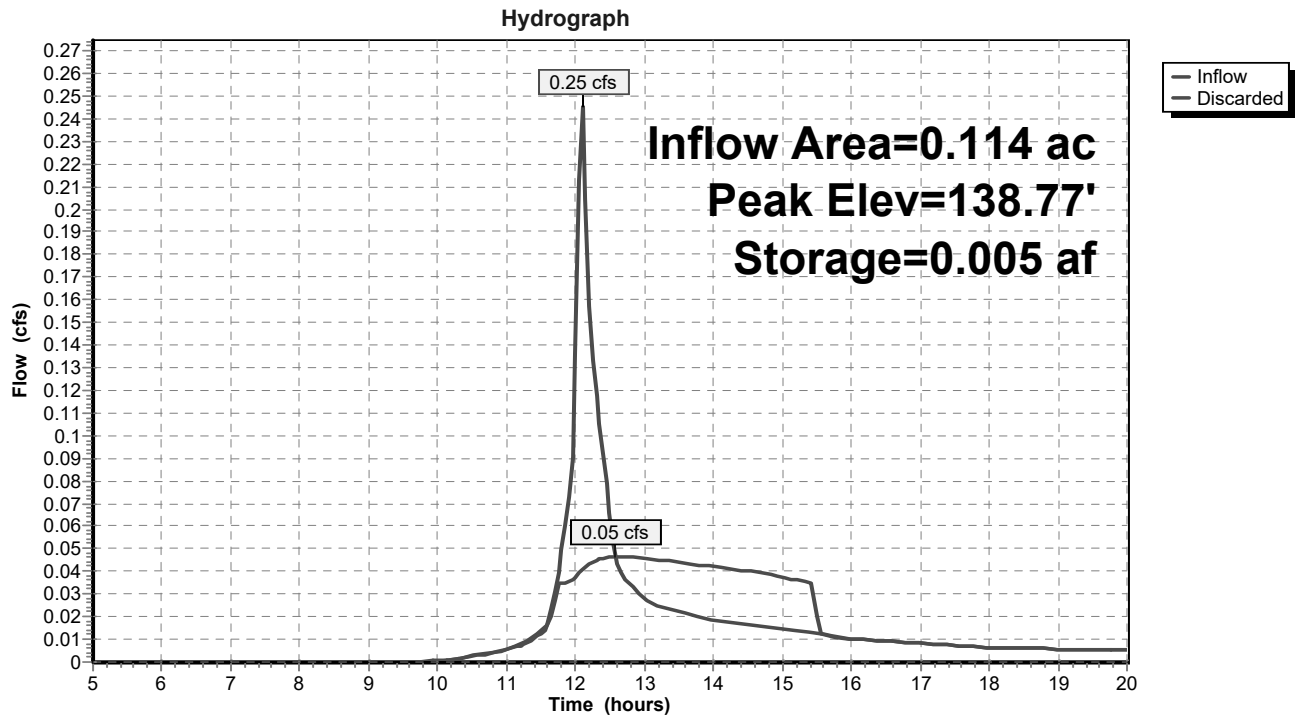

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 24

Summary for Subcatchment 11: DA 11


Runoff = 0.08 cfs @ 12.11 hrs, Volume= 0.006 af, Depth> 1.25"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25 YEAR Rainfall=5.92"

Area (sf)	CN	Description
624	98	Paved parking, HSG A
1,814	39	>75% Grass cover, Good, HSG A
2,438	54	Weighted Average
1,814		74.41% Pervious Area
624		25.59% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 11: DA 11

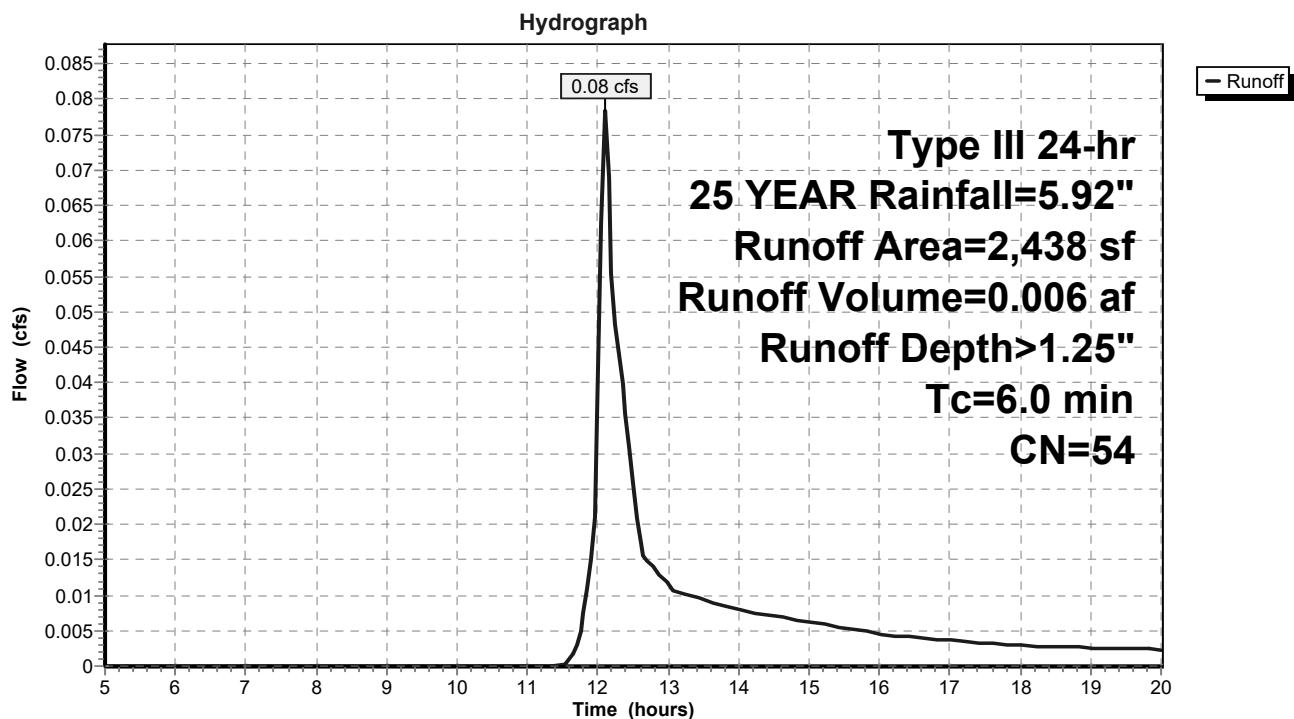

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 25

Summary for Subcatchment 20: DA 20


Runoff = 0.21 cfs @ 12.09 hrs, Volume= 0.015 af, Depth> 3.38"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25 YEAR Rainfall=5.92"

Area (sf)	CN	Description
1,538	98	Paved parking, HSG A
724	39	>75% Grass cover, Good, HSG A
2,262	79	Weighted Average
724		32.01% Pervious Area
1,538		67.99% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 20: DA 20

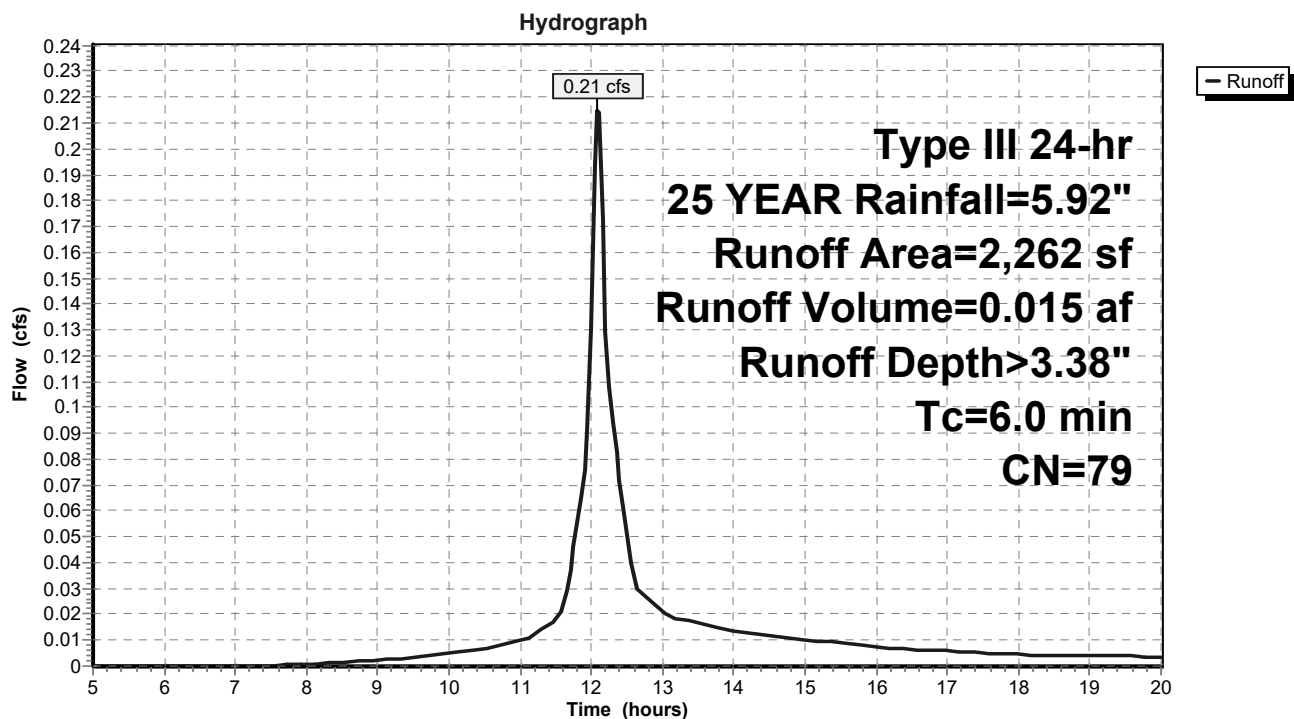

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 26

Summary for Subcatchment 21: DA 21

Runoff = 0.23 cfs @ 12.11 hrs, Volume= 0.017 af, Depth> 1.33"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25 YEAR Rainfall=5.92"

Area (sf)	CN	Description
1,838	98	Paved parking, HSG A
4,816	39	>75% Grass cover, Good, HSG A
6,654	55	Weighted Average
4,816		72.38% Pervious Area
1,838		27.62% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 21: DA 21

Hydrograph

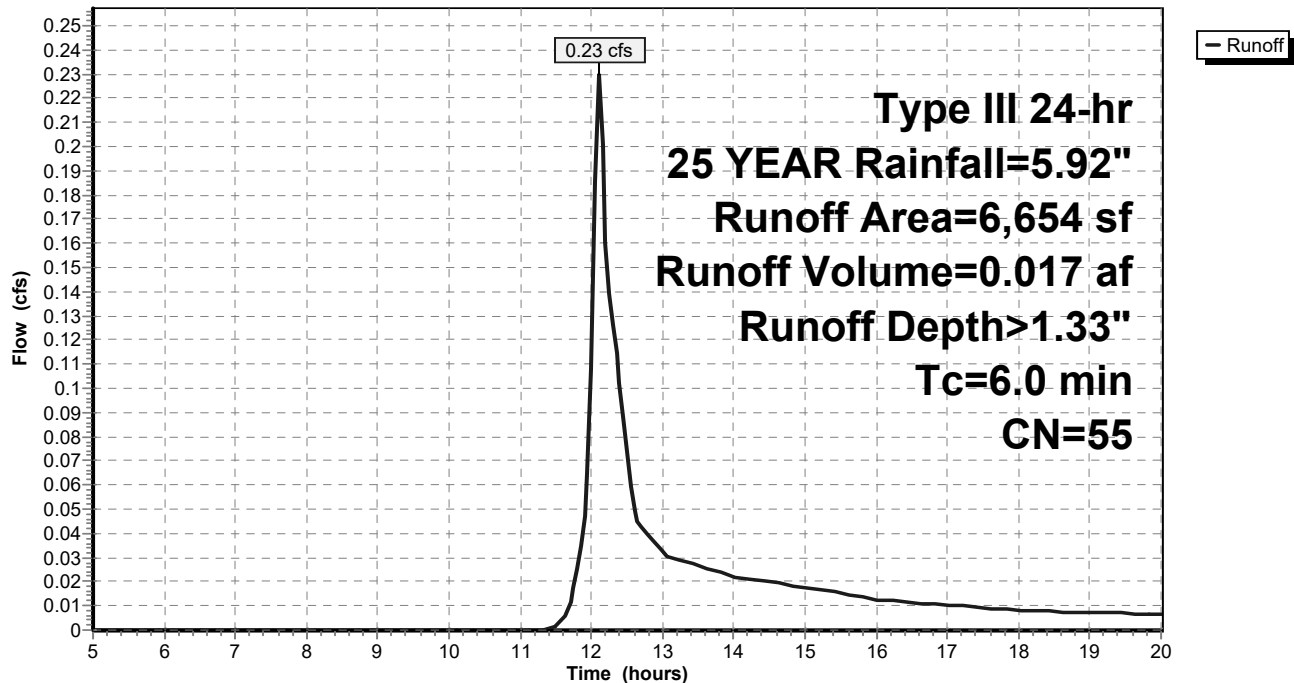

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 27

Summary for Subcatchment 22: DA 22

Runoff = 0.37 cfs @ 12.09 hrs, Volume= 0.025 af, Depth> 2.63"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 25 YEAR Rainfall=5.92"

Area (sf)	CN	Description
2,686	98	Paved parking, HSG A
2,290	39	>75% Grass cover, Good, HSG A
4,976	71	Weighted Average
2,290		46.02% Pervious Area
2,686		53.98% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 22: DA 22

Hydrograph

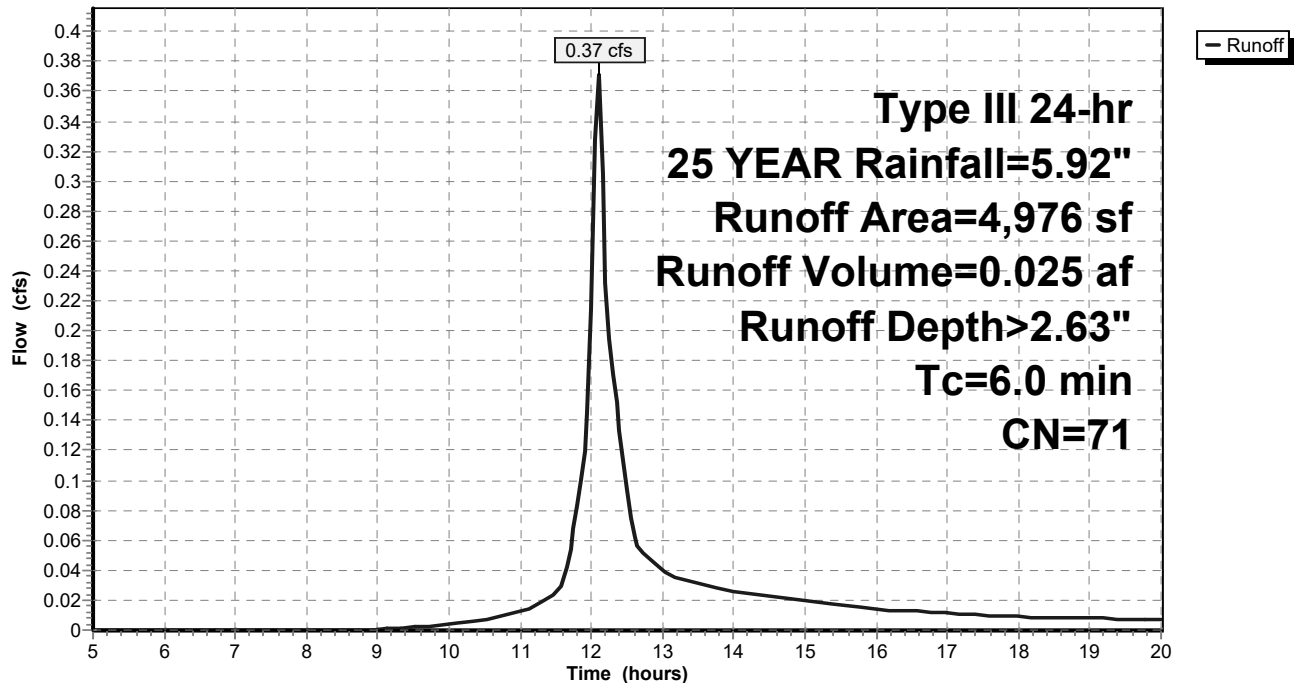

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 28


Summary for Reach SDP1: SDP1

Inflow Area = 0.056 ac, 25.59% Impervious, Inflow Depth > 1.25" for 25 YEAR event
Inflow = 0.08 cfs @ 12.11 hrs, Volume= 0.006 af
Outflow = 0.08 cfs @ 12.11 hrs, Volume= 0.006 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach SDP1: SDP1

Hydrograph

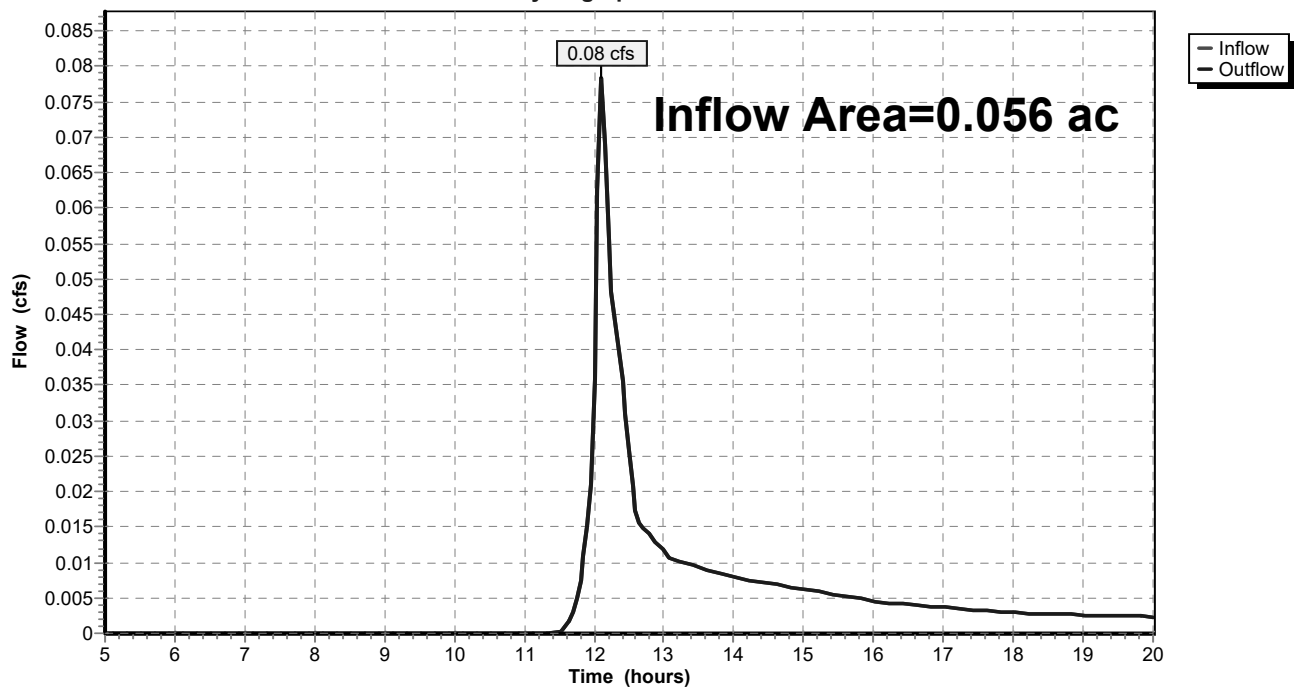

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 29


Summary for Reach SDP2: SDP2

Inflow Area = 0.153 ac, 27.62% Impervious, Inflow Depth > 1.33" for 25 YEAR event
Inflow = 0.23 cfs @ 12.11 hrs, Volume= 0.017 af
Outflow = 0.23 cfs @ 12.11 hrs, Volume= 0.017 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach SDP2: SDP2

Hydrograph

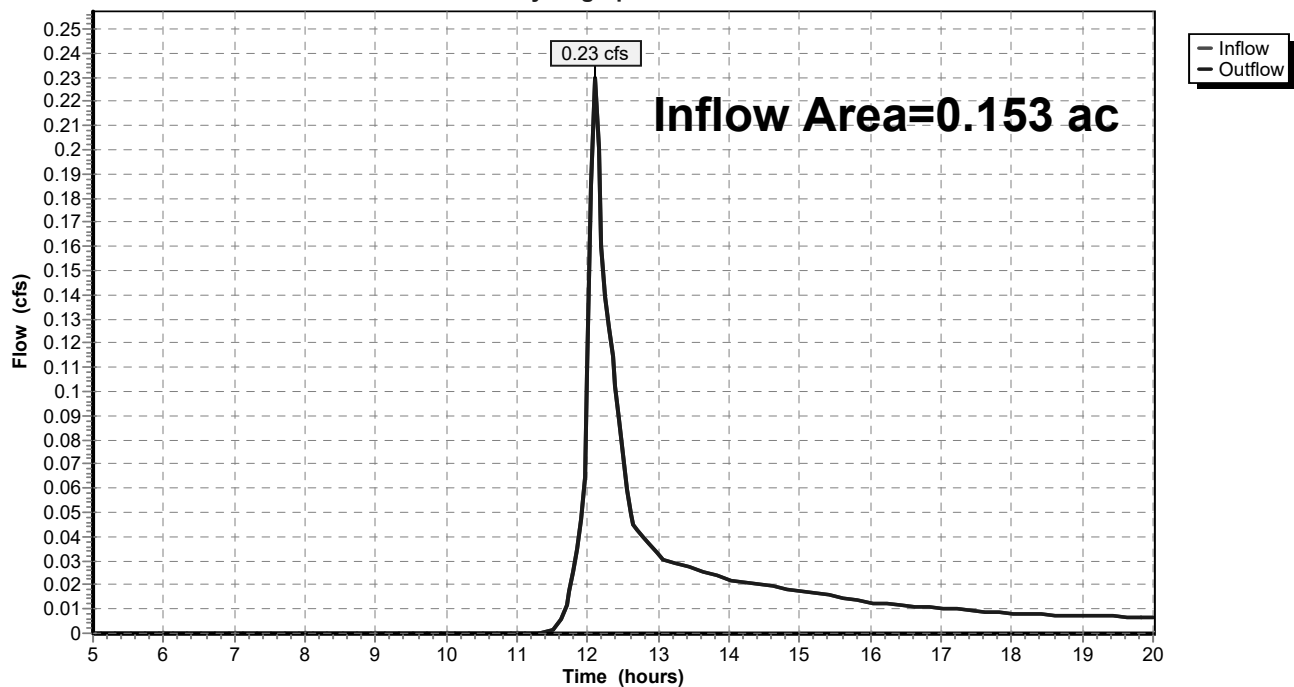

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 30

Summary for Pond 30P: SC-310 Chambers

Inflow Area = 0.052 ac, 67.99% Impervious, Inflow Depth > 3.38" for 25 YEAR event
 Inflow = 0.21 cfs @ 12.09 hrs, Volume= 0.015 af
 Outflow = 0.03 cfs @ 12.65 hrs, Volume= 0.015 af, Atten= 86%, Lag= 33.2 min
 Discarded = 0.03 cfs @ 12.65 hrs, Volume= 0.015 af

Routing by Stor-Ind method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Peak Elev= 141.03' @ 12.65 hrs Surf.Area= 0.004 ac Storage= 0.005 af

Plug-Flow detention time= 65.1 min calculated for 0.015 af (100% of inflow)
 Center-of-Mass det. time= 64.7 min (847.9 - 783.2)

Volume	Invert	Avail.Storage	Storage Description
#1	138.70'	0.004 af	11.50'W x 16.23'L x 3.00'H Prismatic 0.013 af Overall - 0.002 af Embedded = 0.011 af x 40.0% Voids
#2	139.20'	0.002 af	ADS_StormTech SC-310 x 6 Inside #1 Effective Size= 28.9"W x 16.0"H => 2.07 sf x 7.12'L = 14.7 cf Overall Size= 34.0"W x 16.0"H x 7.56'L with 0.44' Overlap Row Length Adjustment= +0.44' x 2.07 sf x 3 rows
		0.006 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Discarded	138.70'	5.000 in/hr Exfiltration over Surface area Conductivity to Groundwater Elevation = 133.00' Phase-In= 0.01'

Discarded OutFlow Max=0.03 cfs @ 12.65 hrs HW=141.03' (Free Discharge)

↑**1=Exfiltration** (Controls 0.03 cfs)

POST DEV

Prepared by Hudson Land Design, P.C.


HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions
Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 31

Pond 30P: SC-310 Chambers

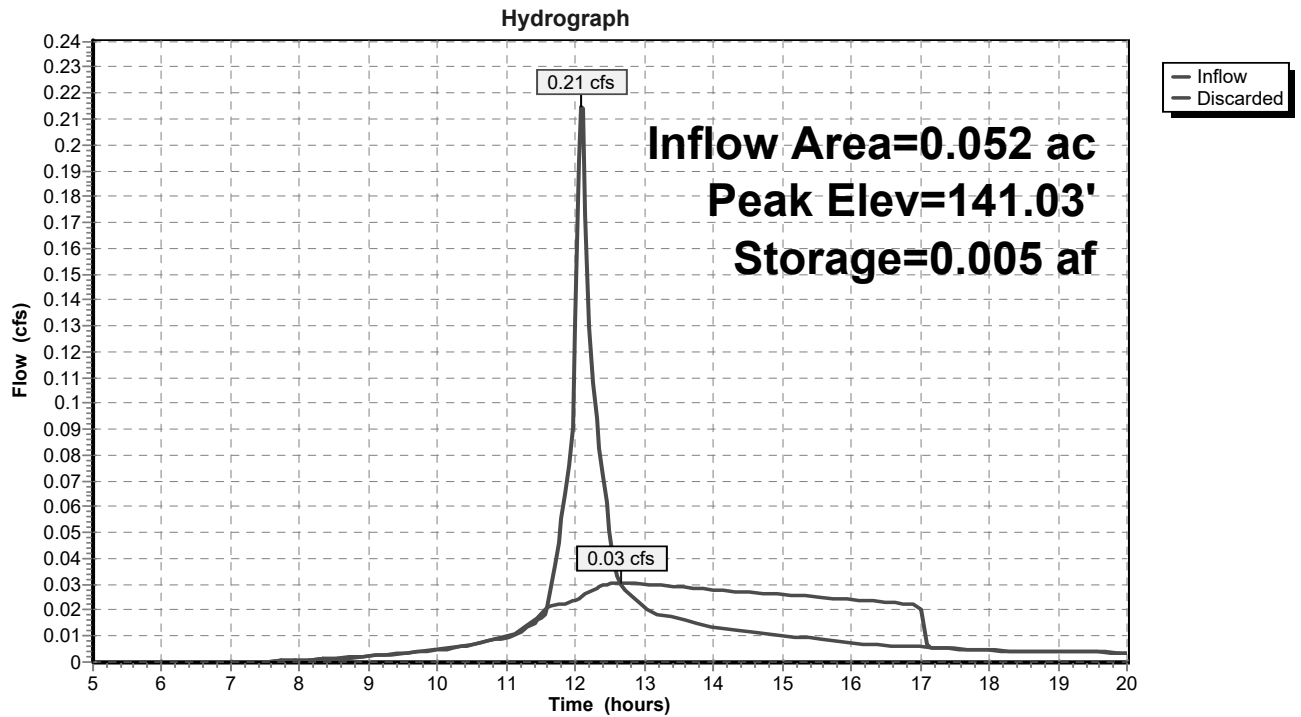

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 32

Summary for Pond 31P: SC-310 Chambers

Inflow Area = 0.114 ac, 53.98% Impervious, Inflow Depth > 2.63" for 25 YEAR event
 Inflow = 0.37 cfs @ 12.09 hrs, Volume= 0.025 af
 Outflow = 0.06 cfs @ 12.63 hrs, Volume= 0.025 af, Atten= 84%, Lag= 31.9 min
 Discarded = 0.06 cfs @ 12.63 hrs, Volume= 0.025 af

Routing by Stor-Ind method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Peak Elev= 140.00' @ 12.63 hrs Surf.Area= 0.007 ac Storage= 0.009 af

Plug-Flow detention time= 62.7 min calculated for 0.025 af (100% of inflow)
 Center-of-Mass det. time= 62.4 min (861.2 - 798.8)

Volume	Invert	Avail.Storage	Storage Description
#1	137.50'	0.007 af	18.20'W x 16.23'L x 3.00'H Prismatic 0.020 af Overall - 0.003 af Embedded = 0.017 af x 40.0% Voids
#2	138.00'	0.003 af	ADS_StormTech SC-310 x 10 Inside #1 Effective Size= 28.9"W x 16.0"H => 2.07 sf x 7.12'L = 14.7 cf Overall Size= 34.0"W x 16.0"H x 7.56'L with 0.44' Overlap Row Length Adjustment= +0.44' x 2.07 sf x 5 rows
		0.010 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Discarded	137.50'	5.000 in/hr Exfiltration over Surface area Conductivity to Groundwater Elevation = 134.00'

Discarded OutFlow Max=0.06 cfs @ 12.63 hrs HW=140.00' (Free Discharge)

↑**1=Exfiltration** (Controls 0.06 cfs)

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions


Type III 24-hr 25 YEAR Rainfall=5.92"

Printed 6/25/2018

Page 33

Pond 31P: SC-310 Chambers

Hydrograph

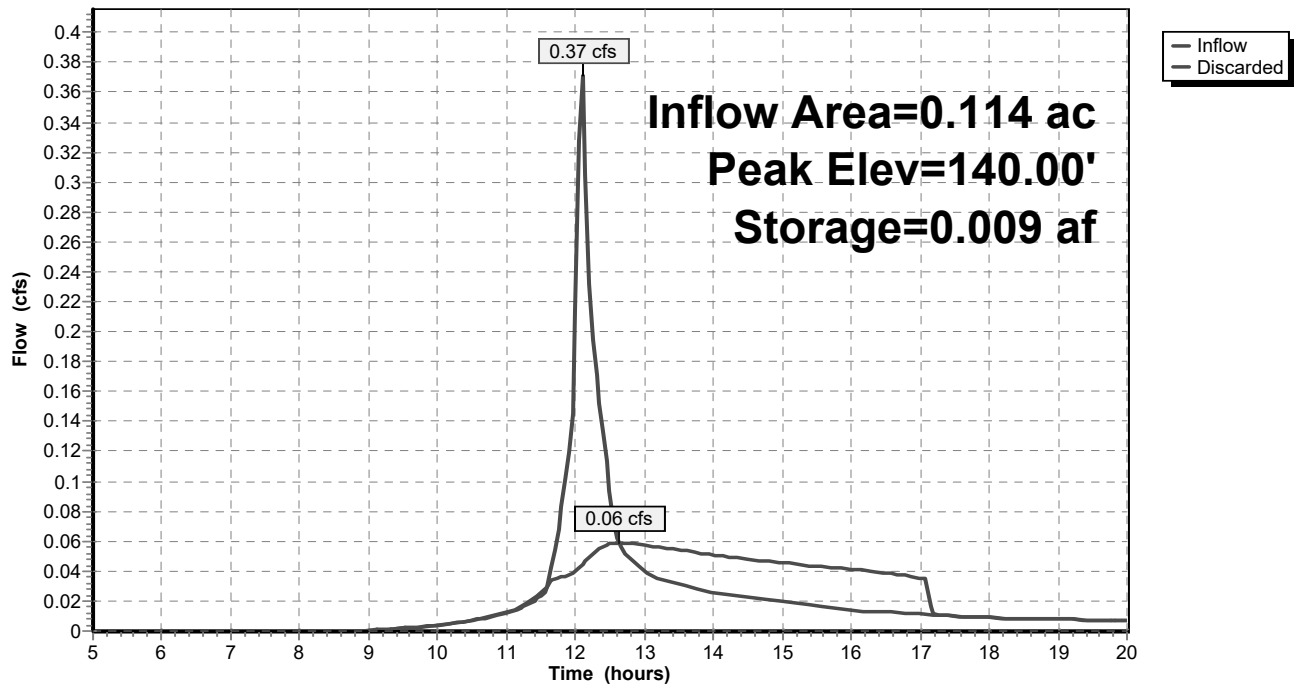

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 34

Summary for Subcatchment 11: DA 11

Runoff = 0.18 cfs @ 12.10 hrs, Volume= 0.012 af, Depth> 2.68"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100 YR Rainfall=8.37"

Area (sf)	CN	Description
624	98	Paved parking, HSG A
1,814	39	>75% Grass cover, Good, HSG A
2,438	54	Weighted Average
1,814		74.41% Pervious Area
624		25.59% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 11: DA 11

Hydrograph

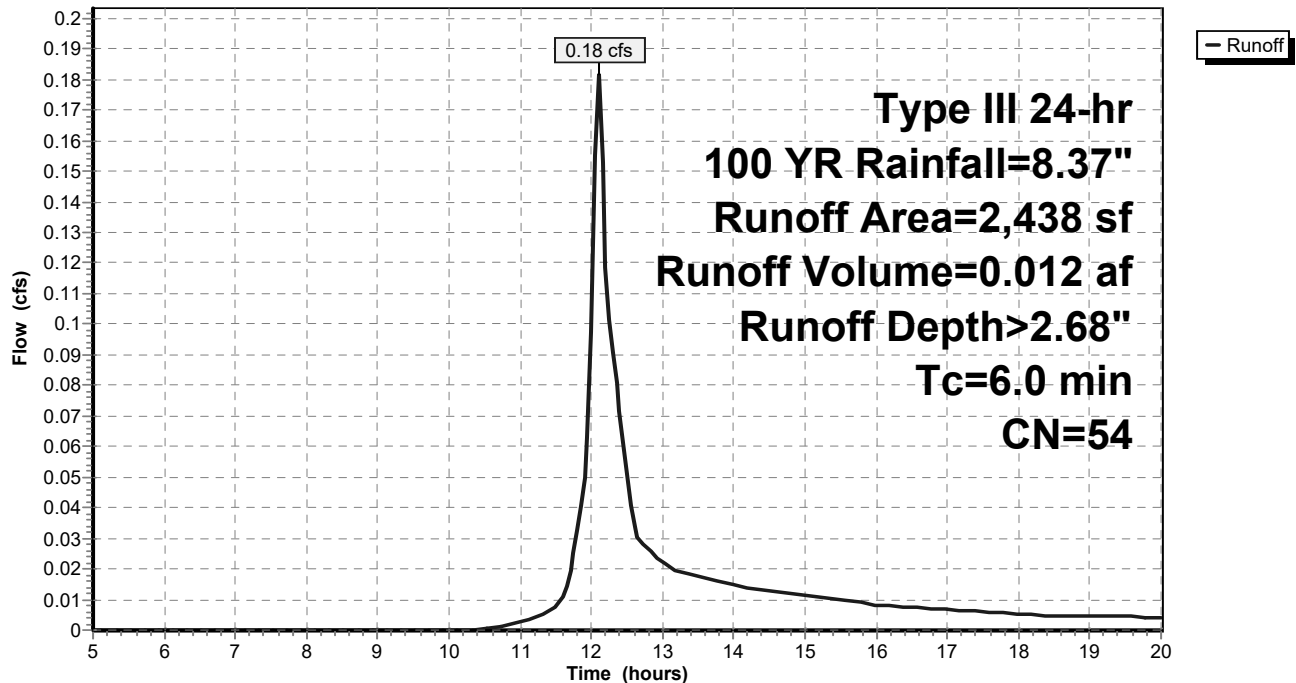

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 35

Summary for Subcatchment 20: DA 20


Runoff = 0.34 cfs @ 12.09 hrs, Volume= 0.024 af, Depth> 5.51"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100 YR Rainfall=8.37"

Area (sf)	CN	Description
1,538	98	Paved parking, HSG A
724	39	>75% Grass cover, Good, HSG A
2,262	79	Weighted Average
724		32.01% Pervious Area
1,538		67.99% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 20: DA 20

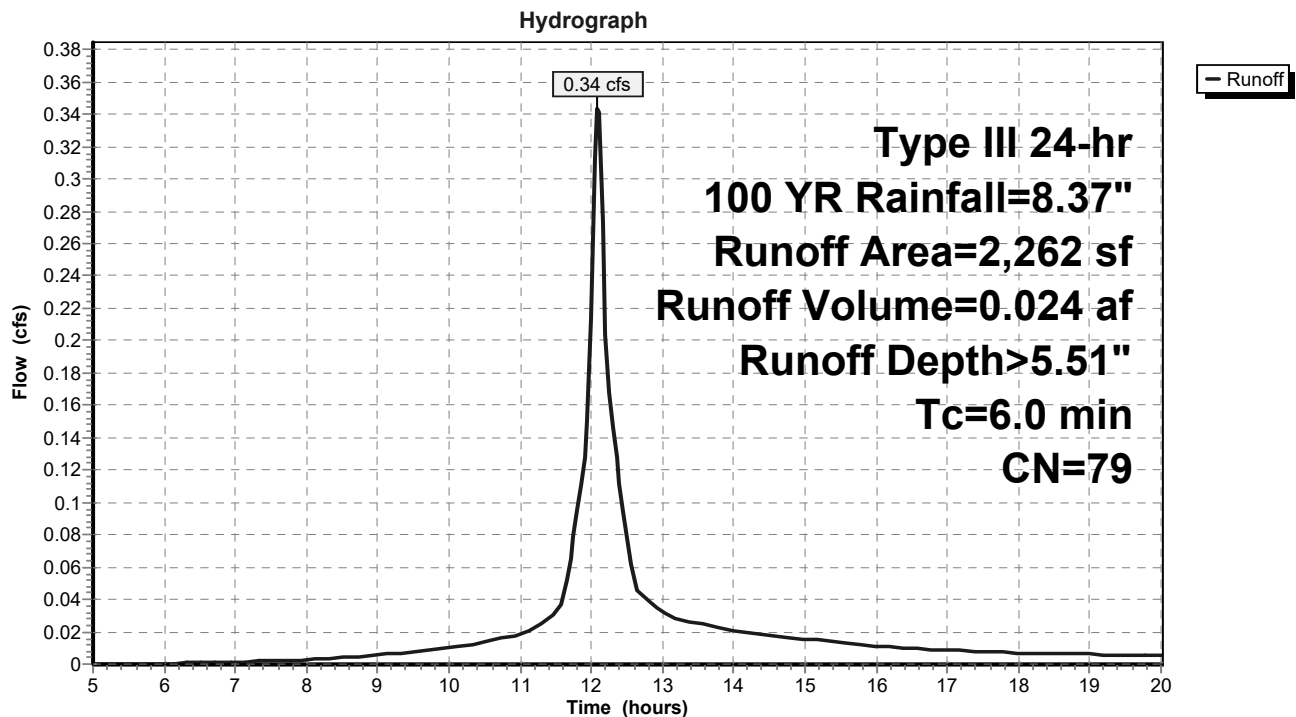

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 36

Summary for Subcatchment 21: DA 21


Runoff = 0.52 cfs @ 12.10 hrs, Volume= 0.035 af, Depth> 2.79"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100 YR Rainfall=8.37"

Area (sf)	CN	Description
1,838	98	Paved parking, HSG A
4,816	39	>75% Grass cover, Good, HSG A
6,654	55	Weighted Average
4,816		72.38% Pervious Area
1,838		27.62% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 21: DA 21

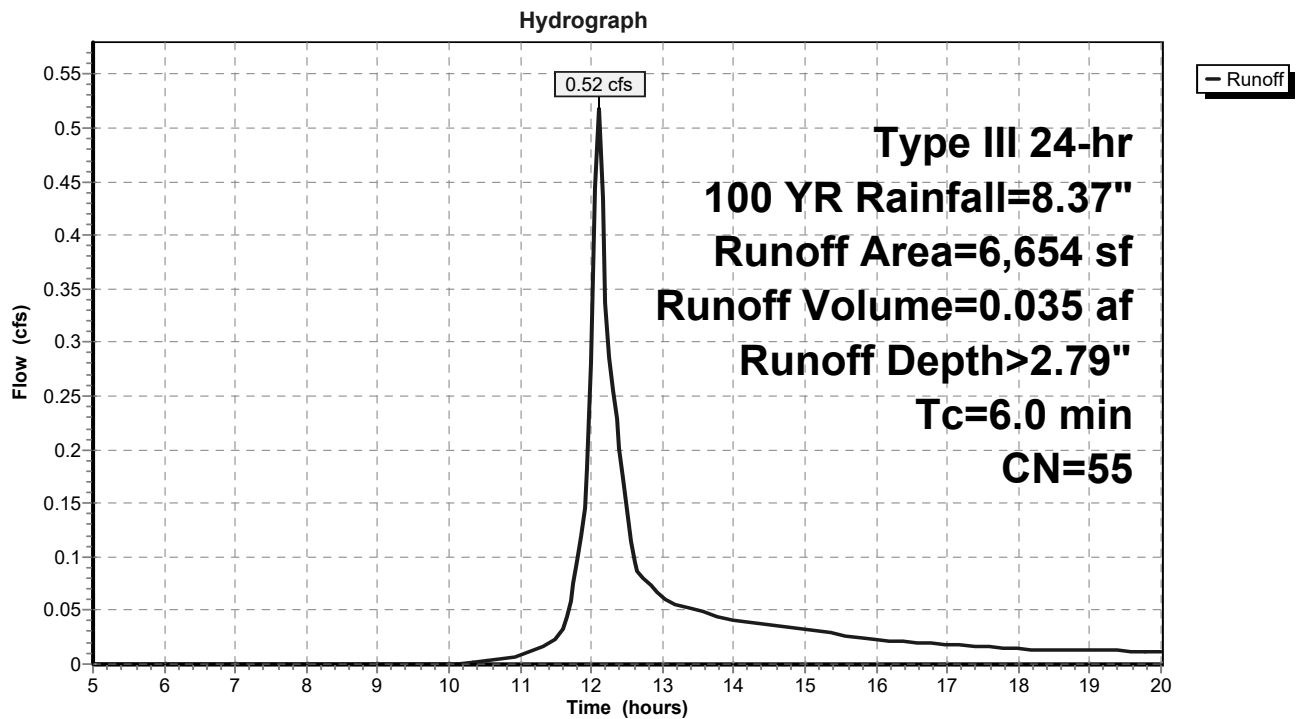

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 37

Summary for Subcatchment 22: DA 22


Runoff = 0.64 cfs @ 12.09 hrs, Volume= 0.044 af, Depth> 4.58"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type III 24-hr 100 YR Rainfall=8.37"

Area (sf)	CN	Description
2,686	98	Paved parking, HSG A
2,290	39	>75% Grass cover, Good, HSG A
4,976	71	Weighted Average
2,290		46.02% Pervious Area
2,686		53.98% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.0					Direct Entry, S1

Subcatchment 22: DA 22

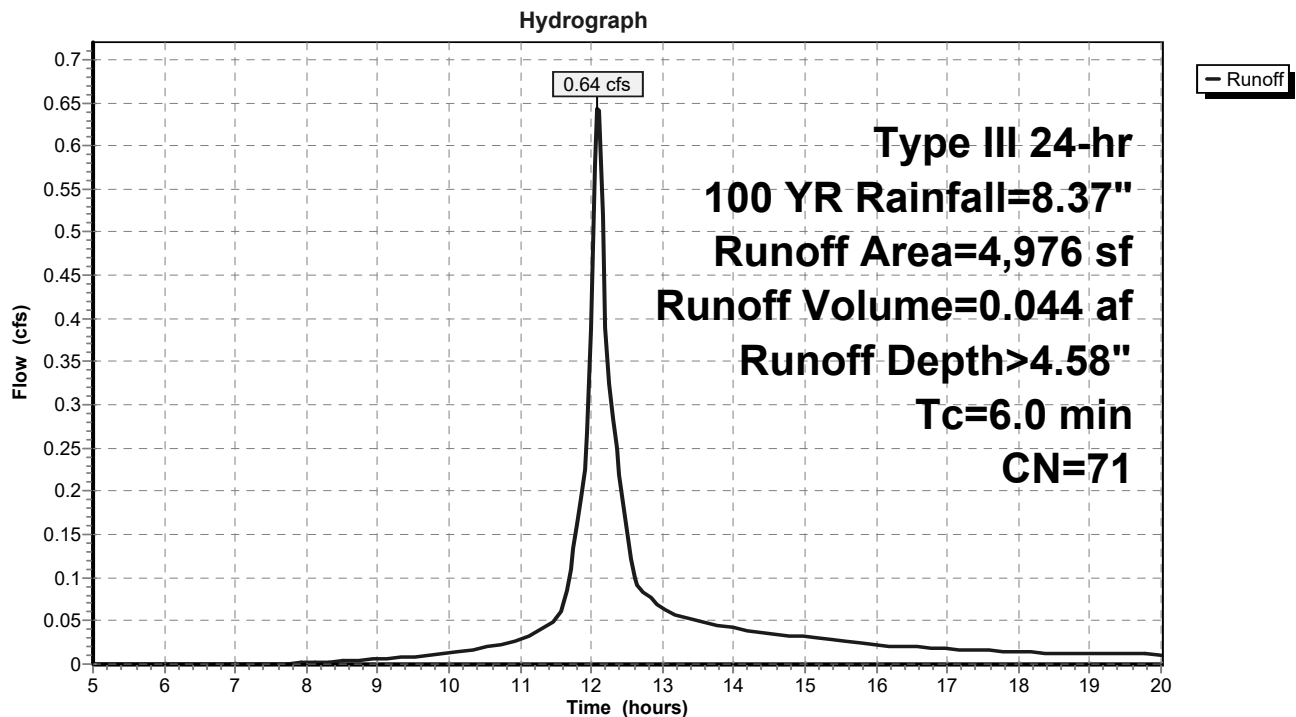

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 38


Summary for Reach SDP1: SDP1

Inflow Area = 0.056 ac, 25.59% Impervious, Inflow Depth > 2.68" for 100 YR event
Inflow = 0.18 cfs @ 12.10 hrs, Volume= 0.012 af
Outflow = 0.18 cfs @ 12.10 hrs, Volume= 0.012 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach SDP1: SDP1

Hydrograph

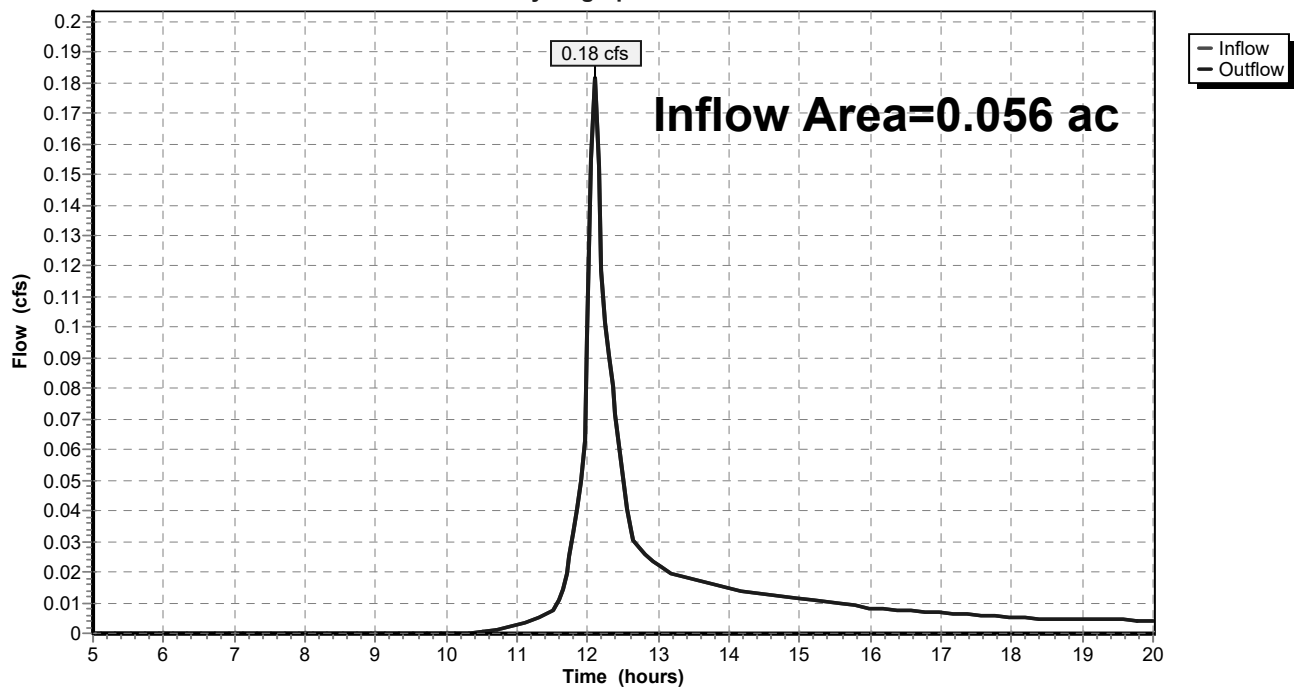

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 39


Summary for Reach SDP2: SDP2

Inflow Area = 0.153 ac, 27.62% Impervious, Inflow Depth > 2.79" for 100 YR event
Inflow = 0.52 cfs @ 12.10 hrs, Volume= 0.035 af
Outflow = 0.52 cfs @ 12.10 hrs, Volume= 0.035 af, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

Reach SDP2: SDP2

Hydrograph

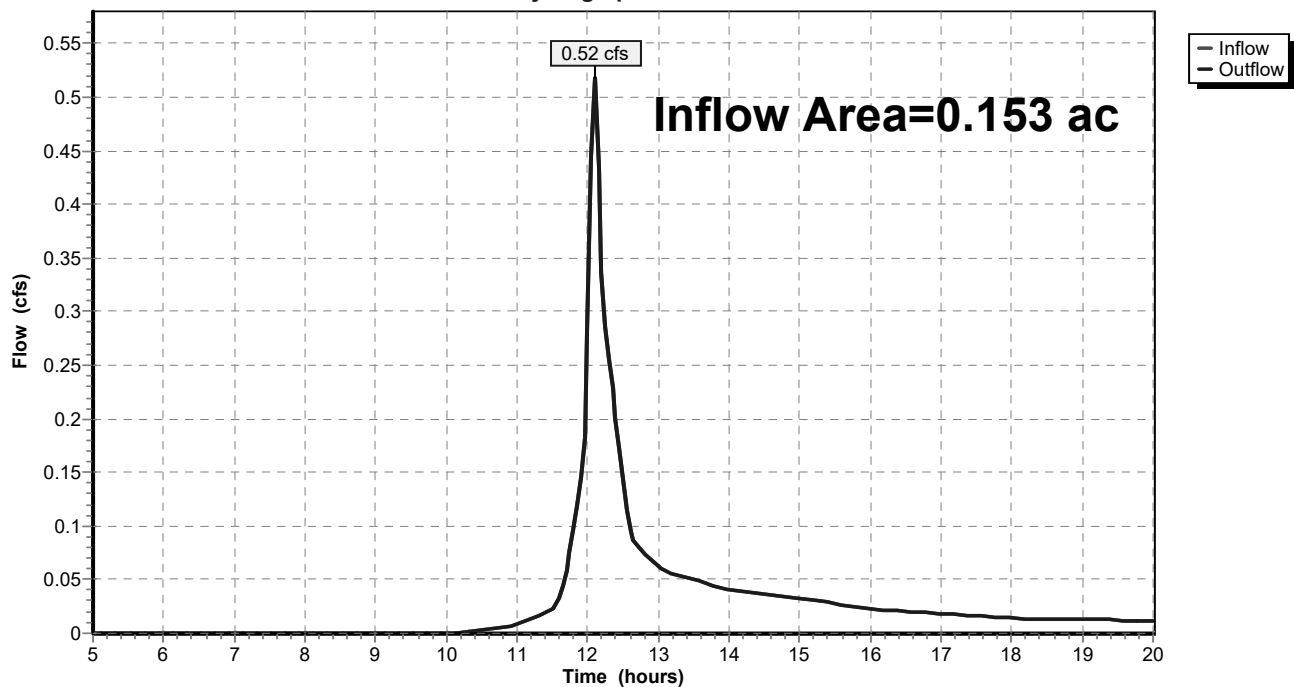

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 40

Summary for Pond 30P: SC-310 Chambers

Inflow Area = 0.052 ac, 67.99% Impervious, Inflow Depth > 5.51" for 100 YR event
 Inflow = 0.34 cfs @ 12.09 hrs, Volume= 0.024 af
 Outflow = 0.28 cfs @ 12.19 hrs, Volume= 0.024 af, Atten= 17%, Lag= 6.0 min
 Discarded = 0.28 cfs @ 12.19 hrs, Volume= 0.024 af

Routing by Stor-Ind method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Peak Elev= 208.01' @ 12.19 hrs Surf.Area= 0.004 ac Storage= 0.006 af

Plug-Flow detention time= 72.7 min calculated for 0.024 af (99% of inflow)
 Center-of-Mass det. time= 69.1 min (840.7 - 771.7)

Volume	Invert	Avail.Storage	Storage Description
#1	138.70'	0.004 af	11.50'W x 16.23'L x 3.00'H Prismatic 0.013 af Overall - 0.002 af Embedded = 0.011 af x 40.0% Voids
#2	139.20'	0.002 af	ADS_StormTech SC-310 x 6 Inside #1 Effective Size= 28.9"W x 16.0"H => 2.07 sf x 7.12'L = 14.7 cf Overall Size= 34.0"W x 16.0"H x 7.56'L with 0.44' Overlap Row Length Adjustment= +0.44' x 2.07 sf x 3 rows
		0.006 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Discarded	138.70'	5.000 in/hr Exfiltration over Surface area Conductivity to Groundwater Elevation = 133.00' Phase-In= 0.01'

Discarded OutFlow Max=0.26 cfs @ 12.19 hrs HW=202.42' (Free Discharge)

↑**1=Exfiltration** (Controls 0.26 cfs)

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC


38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 41

Pond 30P: SC-310 Chambers

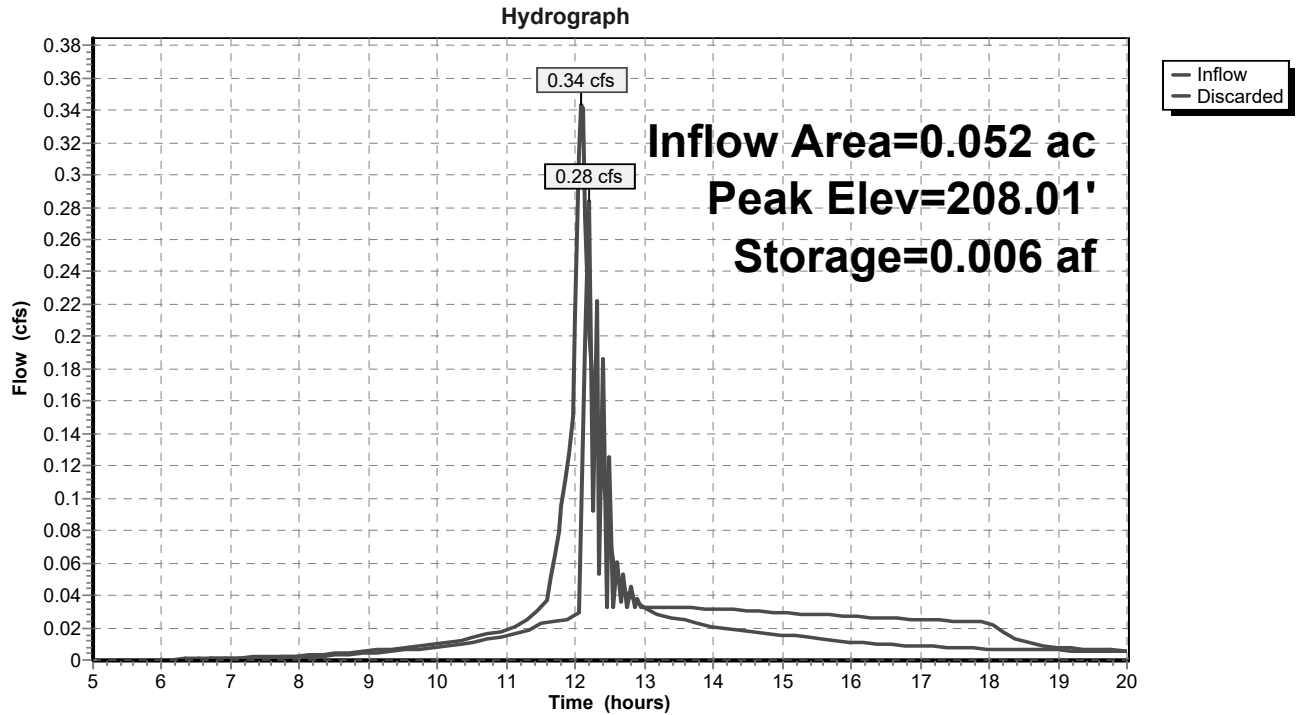

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 42

Summary for Pond 31P: SC-310 Chambers

Inflow Area = 0.114 ac, 53.98% Impervious, Inflow Depth > 4.58" for 100 YR event
 Inflow = 0.64 cfs @ 12.09 hrs, Volume= 0.044 af
 Outflow = 0.89 cfs @ 12.15 hrs, Volume= 0.043 af, Atten= 0%, Lag= 3.5 min
 Discarded = 0.89 cfs @ 12.15 hrs, Volume= 0.043 af

Routing by Stor-Ind method, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Peak Elev= 225.00' @ 12.15 hrs Surf.Area= 0.007 ac Storage= 0.010 af

Plug-Flow detention time= 62.9 min calculated for 0.043 af (99% of inflow)
 Center-of-Mass det. time= 59.3 min (845.5 - 786.1)

Volume	Invert	Avail.Storage	Storage Description
#1	137.50'	0.007 af	18.20'W x 16.23'L x 3.00'H Prismatic 0.020 af Overall - 0.003 af Embedded = 0.017 af x 40.0% Voids
#2	138.00'	0.003 af	ADS_StormTech SC-310 x 10 Inside #1 Effective Size= 28.9"W x 16.0"H => 2.07 sf x 7.12'L = 14.7 cf Overall Size= 34.0"W x 16.0"H x 7.56'L with 0.44' Overlap Row Length Adjustment= +0.44' x 2.07 sf x 5 rows
		0.010 af	Total Available Storage

Device	Routing	Invert	Outlet Devices
#1	Discarded	137.50'	5.000 in/hr Exfiltration over Surface area Conductivity to Groundwater Elevation = 134.00'

Discarded OutFlow Max=0.89 cfs @ 12.15 hrs HW=224.97' (Free Discharge)

↑**1=Exfiltration** (Controls 0.89 cfs)

POST DEV

Prepared by Hudson Land Design, P.C.

HydroCAD® 10.00-20 s/n 04797 © 2017 HydroCAD Software Solutions LLC

38 St Lukes Post Conditions

Type III 24-hr 100 YR Rainfall=8.37"

Printed 6/25/2018

Page 43

Pond 31P: SC-310 Chambers

