

**EROSION & SEDIMENT CONTROL PLAN**  
 SCALE: 1" = 20'  
 GRAPHIC SCALE

( IN FEET )  
 1 inch = 20 ft.

**LEGEND**

- — — — — EXISTING PROPERTY LINE
- — — — — EXISTING ADJOINER LINE
- 120 — — — — EXISTING MAJOR CONTOUR
- 121 — — — — EXISTING MINOR CONTOUR
- +121.17 — — — — EXISTING SPOT ELEVATION
- S — — — — EXISTING SEWER MAIN
- W — — — — EXISTING WATER MAIN
- S — — — — PROPOSED SEWER SERVICE LINE
- W — — — — PROPOSED WATER SERVICE LINE
- ⊙ — — — — EXISTING SEWER MANHOLE
- ⊙ — — — — EXISTING WATER VALVE
- DHW — — — — EXISTING OVERHEAD WIRES
- ⊕ — — — — EXISTING UTILITY POLE
- — — — — EXISTING CATCH BASIN
- — — — — EXISTING FENCE
- ⊕ — — — — PROPOSED CATCH BASIN WITH INLET PROTECTION
- ⊕ — — — — PROPOSED HYDRANT
- ⊕ — — — — PROPOSED WATER VALVE
- ⊕ — — — — PROPOSED SANITARY MANHOLE
- ⊕ — — — — PROPOSED WATER SHUT-OFF VALVE
- ⊕ — — — — PROPOSED CLEAN OUT
- ⊕ — — — — PROPOSED SILT FENCE
- ⊕ — — — — PROPOSED ROOF LEADER
- ⊕ — — — — PROPOSED WET TAP
- ⊕ — — — — PROPOSED RETAINING WALL
- ST — — — — PROPOSED CULVERT
- — — — — PROPOSED UNDERDRAIN
- — — — — PROPOSED ROOF LEADER PIPE
- 120 — — — — PROPOSED MAJOR CONTOUR
- 121 — — — — PROPOSED MINOR CONTOUR
- +121.17 — — — — PROPOSED SPOT ELEVATION
- ⊕ — — — — PROPOSED CLEANOUT
- S — — — — PROPOSED SEWER SERVICE LINE
- W — — — — PROPOSED WATER SUPPLY LINE
- — — — — IMPERVIOUS SURFACE
- ▨ — — — — PROPOSED RIP RAP
- ▨ — — — — PROPOSED CONSTRUCTION ENTRANCE
- ▨ — — — — PROPOSED EROSION CONTROL BLANKET

**INSPECTION SCHEDULE & MAINTENANCE OF EROSION AND SEDIMENT CONTROL MEASURES**

**PERMANENT AND TEMPORARY VEGETATION:**  
 INSPECT ALL AREAS THAT HAVE RECEIVED VEGETATION EVERY SEVEN DAYS AND AFTER EVERY STORM EVENT WITH RAINFALL THAT EQUALS OR EXCEEDS 0.5 INCH. ALL AREAS DAMAGED BY EROSION OR WHERE SEED HAS NOT ESTABLISHED SHALL BE REPAIRED AND RESTABILIZED IMMEDIATELY.

**STABILIZED CONSTRUCTION ENTRANCE:**  
 INSPECT THE ENTRANCE PAD EVERY SEVEN DAYS AND AFTER EVERY STORM EVENT WITH RAINFALL THAT EQUALS OR EXCEEDS 0.5 INCH. CHECK FOR MUD, SEDIMENT BUILD-UP AND PAD INTEGRITY. MAKE DAILY INSPECTIONS DURING WET WEATHER. REGRADE PAD AS NEEDED FOR RUNOFF CONTROL. WASH AND REPLACE STONE AS NEEDED. THE STONE IN THE ENTRANCE SHOULD BE WASHED OR REPLACED WHENEVER THE ENTRANCE FAILS TO REDUCE MUD BEING CARRIED OFF SITE BY VEHICLES. IMMEDIATELY REMOVE MUD AND SEDIMENT TRACKED OR WASHED ONTO PUBLIC ROADS BY BRUSHING OR SWEEPING. REMOVE TEMPORARY CONSTRUCTION ENTRANCE AS SOON AS THEY ARE NO LONGER NEEDED TO PROVIDE ACCESS TO THE SITE AS DIRECTED BY PROJECT ENGINEER.

**SILT FENCE:**  
 INSPECT FOR DAMAGE EVERY SEVEN DAYS AND AFTER EVERY STORM EVENT WITH RAINFALL THAT EQUALS OR EXCEEDS 0.5 INCH. MAKE ALL REPAIRS IMMEDIATELY. REMOVE SEDIMENT FROM THE UP-SLOPE FACE OF THE FENCE BEFORE IT ACCUMULATES TO A HEIGHT EQUAL TO ONE-QUARTER THE HEIGHT OF THE FENCE. IF FENCE FABRIC TEARS, BEGINS TO DECOMPOSE, OR IN ANY WAY BECOMES INEFFECTIVE, REPLACE THE AFFECTED SECTION OF FENCE IMMEDIATELY.

**SOIL STOCKPILE:**  
 INSPECT SEDIMENT CONTROL BARRIERS (SILT FENCE) AND VEGETATION FOR DAMAGE EVERY SEVEN DAYS AND AFTER EVERY STORM EVENT WITH RAINFALL THAT EQUALS OR EXCEEDS 0.5 INCH. MAKE ALL REPAIRS IMMEDIATELY. REMOVE SEDIMENT FROM THE UP-SLOPE FACE OF THE SEDIMENT CONTROL BARRIER BEFORE IT ACCUMULATES TO A HEIGHT EQUAL TO ONE-QUARTER THE HEIGHT OF THE SEDIMENT CONTROL BARRIER. IF SEDIMENT CONTROL BARRIER TEARS, BEGINS TO DECOMPOSE, OR IN ANY WAY BECOMES INEFFECTIVE, REPLACE THE AFFECTED SECTION OF SEDIMENT CONTROL BARRIER IMMEDIATELY. REVEGETATE DISTURBED AREA TO STABILIZE SOIL STOCKPILE. REMOVE THE SEDIMENT CONTROL BARRIER WHEN THE SOIL STOCKPILE HAS BEEN REMOVED.

**DUST CONTROL:**  
 SCHEDULE CONSTRUCTION OPERATIONS TO MINIMIZE THE AMOUNT OF DISTURBED AREAS AT ANY ONE TIME DURING THE COURSE OF WORKS. APPLY TEMPORARY SOIL STABILIZATION PRACTICES SUCH AS MULCHING, SEEDING, AND SPRAYING (WATER). STRUCTURAL MEASURES (MULCH, SEEDING) SHALL BE INSTALLED IN DISTURBED AREAS BEFORE SIGNIFICANT BLOWING PROBLEMS DEVELOP. WATER SHALL BE SPRAYED AS NEEDED. REPEAT AS NEEDED, BUT AVOID EXCESSIVE SPRAYING, WHICH COULD CREATE RUNOFF AND EROSION PROBLEMS.

**CHECK DAM:**  
 INSPECT CHECK DAMS EVERY SEVEN DAYS AND AFTER EVERY STORM EVENT WITH RAINFALL THAT EQUALS OR EXCEEDS 0.5 INCH. IF SIGNIFICANT EROSION OCCURS BETWEEN STRUCTURES, A LINER OF STONE OR OTHER SUITABLE MATERIAL SHOULD BE INSTALLED IN THAT PORTION OF THE CHANNEL. REMOVE SEDIMENT ACCUMULATED BEHIND THE DAM AS NEEDED TO ALLOW CHANNEL TO DRAIN THROUGH THE STONE CHECK DAM AND PREVENT LARGE FLOWS FROM CARRYING SEDIMENT OVER THE DAM. REPLACE STONES AS NEEDED TO MAINTAIN THE DESIGN CROSS SECTION OF THE STRUCTURES. REMOVE CHECK DAMS AS PER APPROVAL OF THE PROJECT ENGINEER.

**EROSION CONTROL BLANKET:**  
 INSPECT THE BLANKET EVERY SEVEN DAYS AND AFTER EVERY STORM EVENT WITH RAINFALL THAT EQUALS OR EXCEEDS 0.5 INCH. REPLACE WIRE STAPLES AS REQUIRED. REPAIR AND RESEED WHERE CRACKS AND DAMAGED VEGETATION IS EVIDENT. WHEN DAMAGED BEYOND REPAIR OR NO LONGER FUNCTIONING, THE BLANKET SHALL BE REPLACED.

**DEWATERING PITS:**  
 (IF REQUIRED) - INSPECT DAILY DURING OPERATION FOR CLOGGING OR OVERFLOW. CLEAR INLET AND DISCHARGE PIPES OF OBSTRUCTIONS. IF A FILTER MATERIAL BECOMES CLOGGED WITH SEDIMENT, PIT SHALL BE DISMANTLED AND NEW PITS SHALL BE CONSTRUCTED AS NEEDED.

**SEDIMENT TRAP:**  
 SEDIMENT SHALL BE REMOVED AND THE TRAP RESTORED TO THE ORIGINAL DIMENSIONS WHEN THE SEDIMENT HAS ACCUMULATED TO ONE-HALF OF THE DESIGN DEPTH OF THE TRAP. SEDIMENT REMOVED FROM THE TRAP SHALL BE DEPOSITED IN A PROTECTED AREA IN SUCH A MANNER THAT IT WILL NOT ERODE.

**CATCH BASINS:**  
 ALL CATCH BASINS SHALL BE INSPECTED AFTER EACH STORM EVENT FOR SEDIMENT ACCUMULATION, AND DEBRIS, AND REMOVE AS NECESSARY. THE INLET PROTECTION SHALL BE INSPECTED FOR SEDIMENT ACCUMULATION AND REPLACED AS NECESSARY. WHEN SEDIMENT ACCUMULATION WITHIN THE CATCH BASIN SUMP REACHES 1/2 OF THE SUMP DEPTH, IT SHALL BE REMOVED.

Now or Formerly  
 Stafford  
 Doc. #02-2016-8747  
 6054-21-033880

Now or Formerly  
 Doc. #02-2016-8766  
 6054-21-027879

Now or Formerly  
 Doc. #02-2016-8890  
 6054-29-036860

Now or Formerly  
 Doc. #02-2016-8890  
 6054-29-036860

Now or Formerly  
 Doc. #02-2016-8890  
 6054-29-036860

Now or Formerly  
 Doc. #02-2016-8890  
 6054-29-036860

Now or Formerly  
 Doc. #02-2016-8890  
 6054-29-036860

DRAWN BY: CMB


NO.	DATE	DESCRIPTION	BY
1	2/26/19	PER PLANNING BOARD COMMENTS	CMB
2	3/26/19	PER PLANNING BOARD COMMENTS	CMB
3	4/30/19	PER PLANNING BOARD COMMENTS	CMB
4	5/28/19	PER PLANNING BOARD COMMENTS	ESR
5	6/25/19	NO CHANGES THIS SHEET	AG

CHECKED BY: MAB

NO.	DATE	DESCRIPTION	BY

**Dig Safely New York**  
 800-962-7962  
 www.digsafelynewyork.org

- Call Before You Dig
- Wait The Required Time
- Confirm Utility Response
- Respect the Marks
- Dig With Care

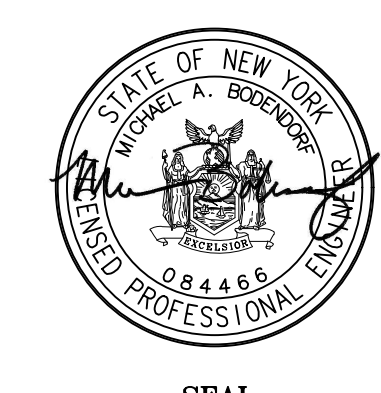

**HUDSON LAND DESIGN**  
 HUDSON LAND DESIGN  
 PROFESSIONAL ENGINEERING P.C.  
 174 MAIN ST., BEACON, NEW YORK 12508  
 13 CHAMBERS ST., NEWBURGH, NEW YORK 12550  
 PH: 845-440-6926  
 F: 845-440-6637

**EROSION & SEDIMENT CONTROL PLAN**  
 53 ELIZA STREET  
 53 ELIZA STREET  
 CITY OF BEACON  
 DUTCHESS COUNTY, NEW YORK  
 TAX ID: 6054-29-031870

JOB #: 2018:032

DATE: 8/28/18

SCALE: 1"=20'

TITLE: ESC-1

SHEET: 7 OF 13